
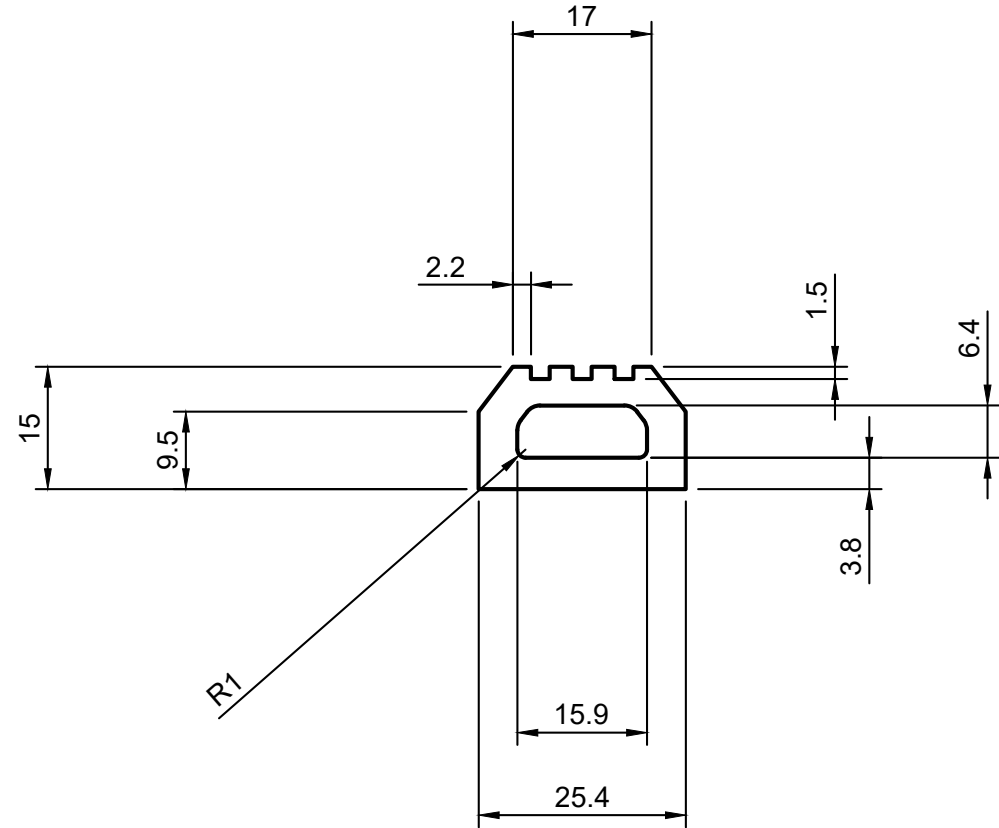
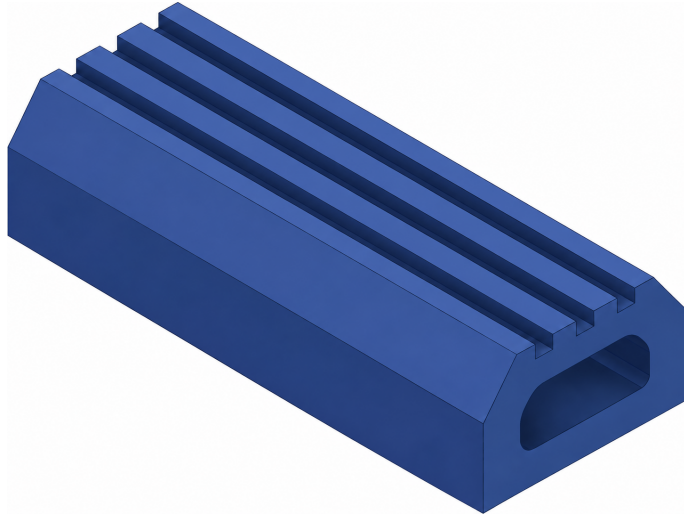


CASTELLATED INFLATABLE SEAL PROFILE



Inflated height (mm)	16.5	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026	Page A4 · 1/1				
Cross-sectional area (mm²)	251				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar	Approved by Arif Çınar				
Weight (kg/m)	0.326				Material								
INFLATION PRESSURE (bar)					Silicone rubber			Hardness: 60 Shore A Colour: Natural					
Recommended	1.03				Projection								
Maximum	1.38							Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			
MIN. BEND RADIUS (mm)											Castellated Inflatable Seal Profile		
Radially inward	70												Profile No. 1565
Radially outward	70												
Axial	170												