
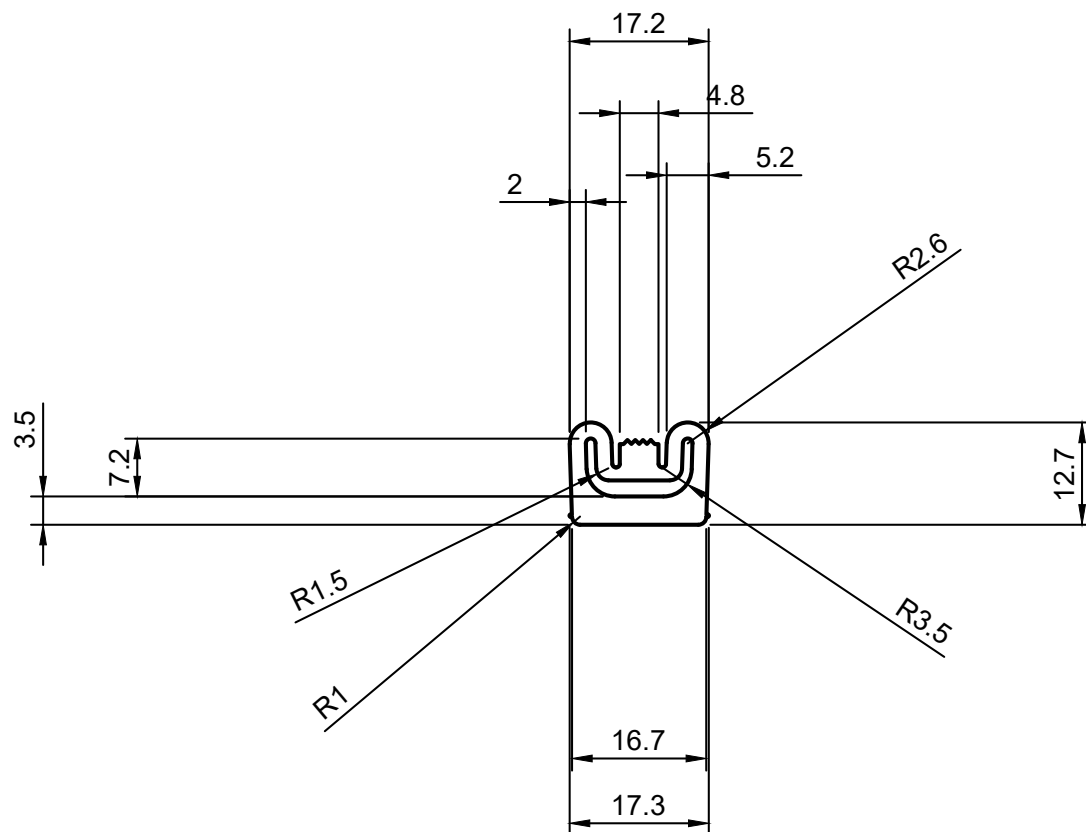
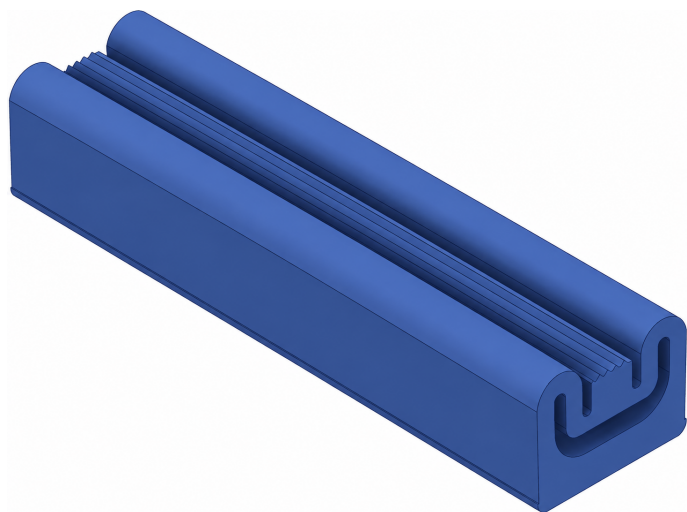


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	24	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1							
Cross-sectional area (mm²)	153				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar							
Weight (kg/m)	0.199				Material Silicone rubber			Hardness: 60 Shore A Colour: Natural		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com					
INFLATION PRESSURE (bar)														Revision No: 0		Scale: -	
Recommended	1.03													Flexible Sidewall Inflatable Seal Profile			
Maximum	1.38																
MIN. BEND RADIUS (mm)																	
Radially inward	140																
Radially outward	40																
Axial	120				Projection 			Profile No. 1602									