
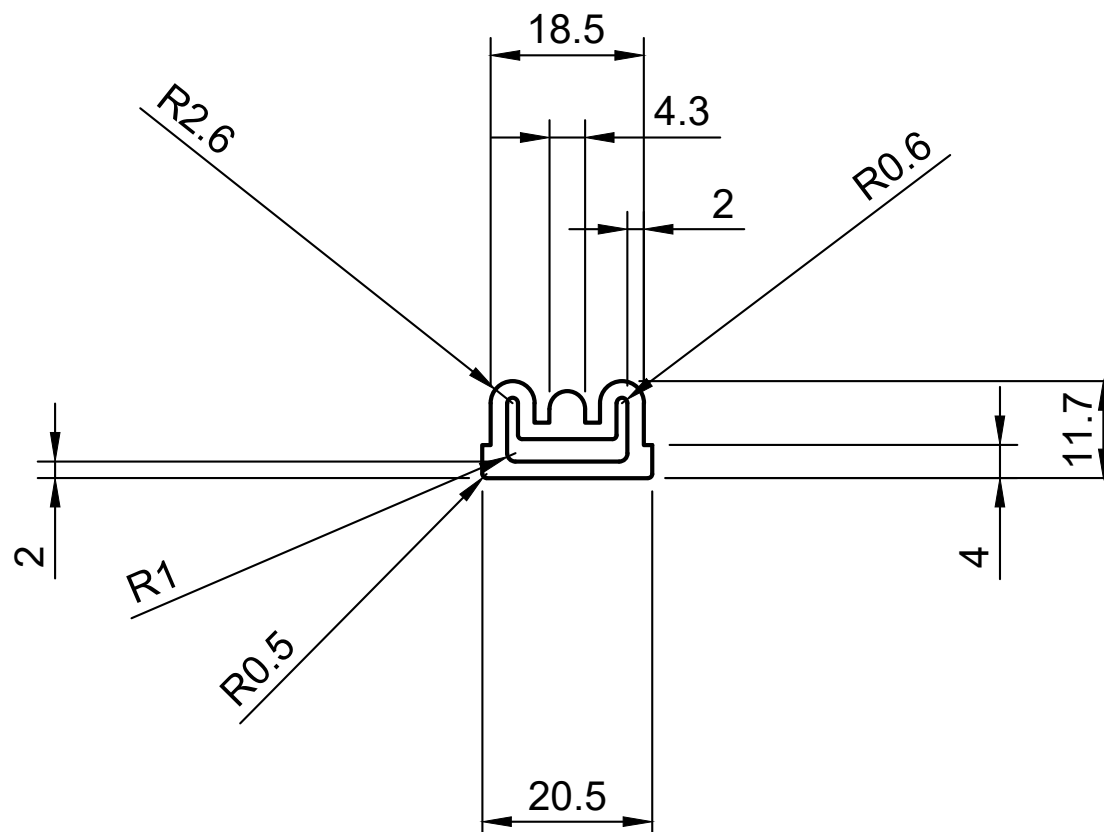
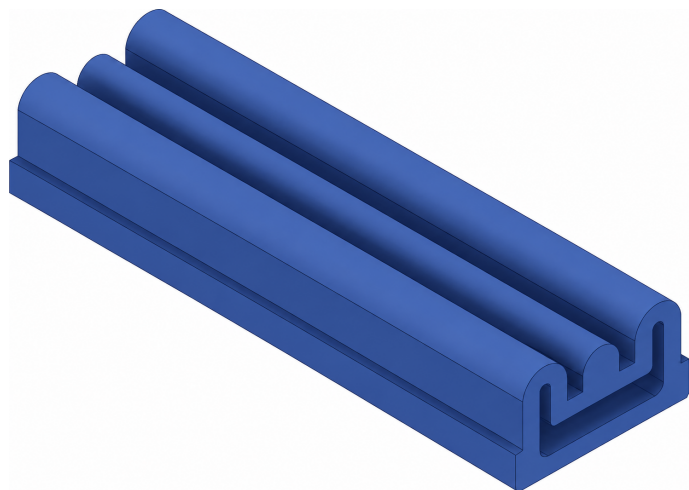


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	21	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance			Date 09.09.2026		Page A4 · 1/1								
Cross-sectional area (mm²)	142				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar								
Weight (kg/m)	0.185				0.0	1.5		0.40	Material Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com							
INFLATION PRESSURE (bar)					1.5	2.5		0.50										
Recommended	1.03				2.5	4.0		0.70										
Maximum	1.38				4.0	6.3		0.80	Hardness: 60 Shore A Colour: Natural						Revision No: 0 Scale: - Flexible Sidewall Inflatable Seal Profile Profile No. 2264			
MIN. BEND RADIUS (mm)					6.3	10.0		1.00										
Radially inward	50				10.0	16.0		1.30	Projection 									
					16.0	25.0		1.60										
Radially outward	60				25.0	40.0		2.00										
		40.0	63.0	2.50														
Axial	210	63.0	100.0	3.20														
		100.0	-	3.2%														