


A 3D perspective view of a blue, rectangular, ribbed component. The component has a series of parallel, rounded ribs on its top surface. It features a large, semi-circular cutout on the right side, revealing a hollow interior. The component is shown against a white background.

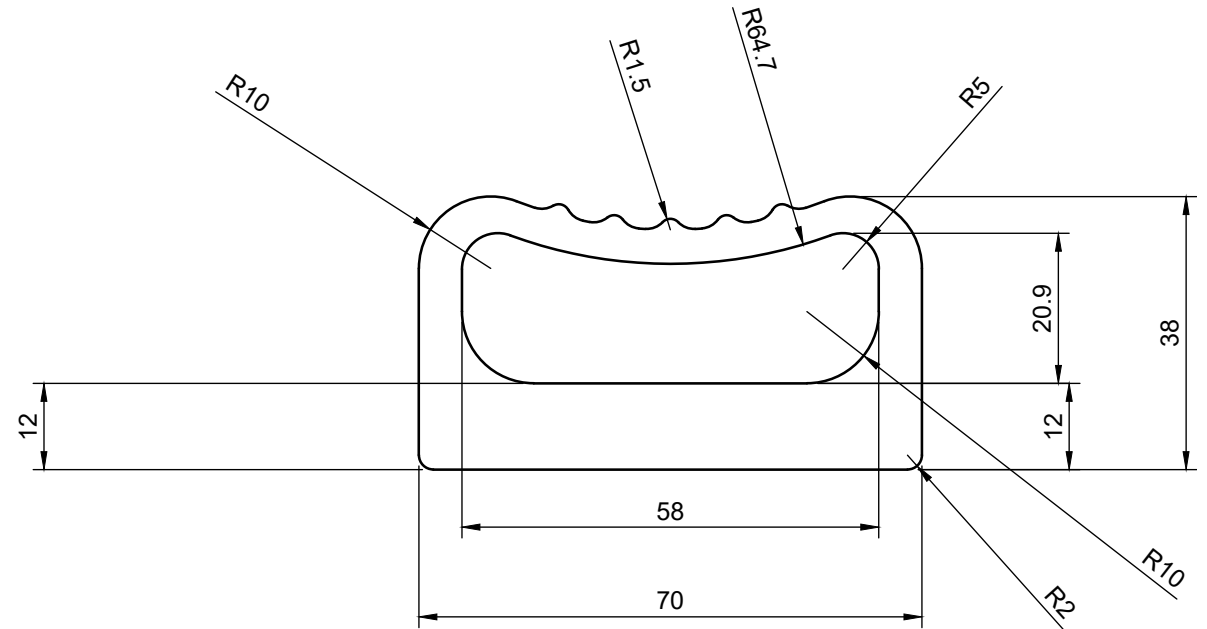

Inflated height (mm)	50	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1					
Cross-sectional area (mm²)	1468				ISO 3302-1: 2014 E3										
Weight (kg/m)	1.908				Material					Drawn by Serhat Çınar		Approved by Arif Çınar			
INFLATION PRESSURE (bar)					Silicone rubber										
Recommended	1.72				Hardness: 60 Shore A			Colour: Natural				Revision No: 0		Scale: -	
Maximum	2.07				Projection					Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com		Custom Section Inflatable Seal Profile Profile No. 2688	
MIN. BEND RADIUS (mm)															
Radially inward	200														
Radially outward	200														
Axial	Not specified														