
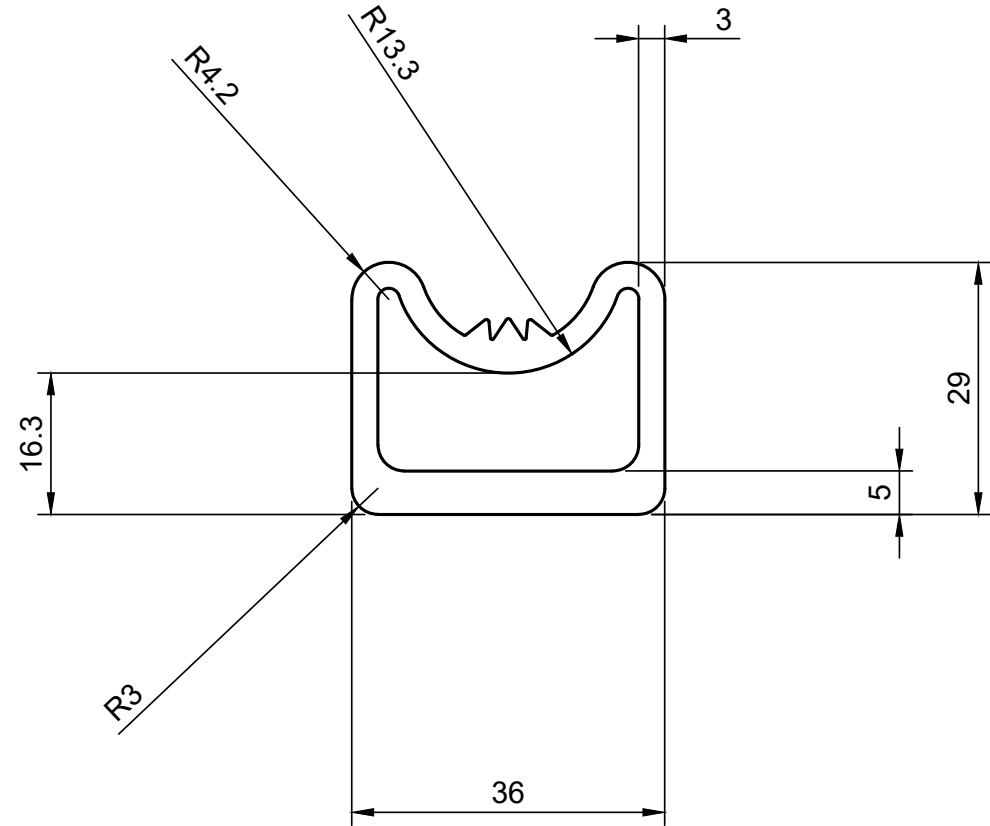
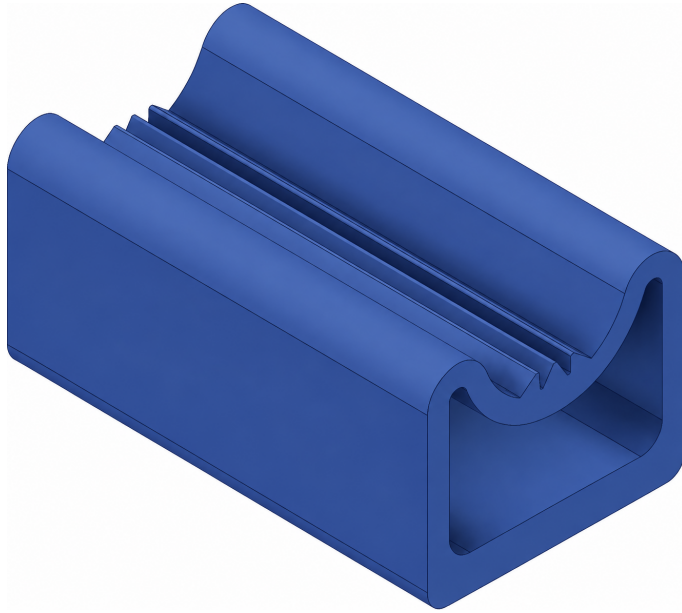


CHANNEL FIT INFLATABLE SEAL PROFILE



Inflated height (mm)	42.5	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1					
Cross-sectional area (mm²)	500				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar					
Weight (kg/m)	0.650				Material Silicone rubber			Hardness: 60 Shore A Colour: Natural		Revision No: 0		Scale: -			
INFLATION PRESSURE (bar)														Projection 	
Recommended	1.03				0.0	1.5		0.40			Beykent Industrial Estate		Prepared by Çınar Silikon		
Maximum	1.38				1.5	2.5		0.50			141 Sakarya Street		Mam. San. ve Tic. Ltd. Şti.		
MIN. BEND RADIUS (mm)					2.5	4.0		0.70			Buyukcekmece / Istanbul		Reproduction or sharing		
					4.0	6.3		0.80			Turkey		with third parties requires		
Radially inward	130	6.3	10.0	1.00			+90 538 840 29 87		prior written permission.						
Radially outward	270	10.0	16.0	1.30			info@inflatablegaskets.com		info@cinarsilikon.com						
Axial	370	16.0	25.0	1.60			www.inflatablegaskets.com		www.cinarsilikon.com						
		25.0	40.0	2.00											
		40.0	63.0	2.50											
		63.0	100.0	3.20											
		100.0	-	3.2%											