

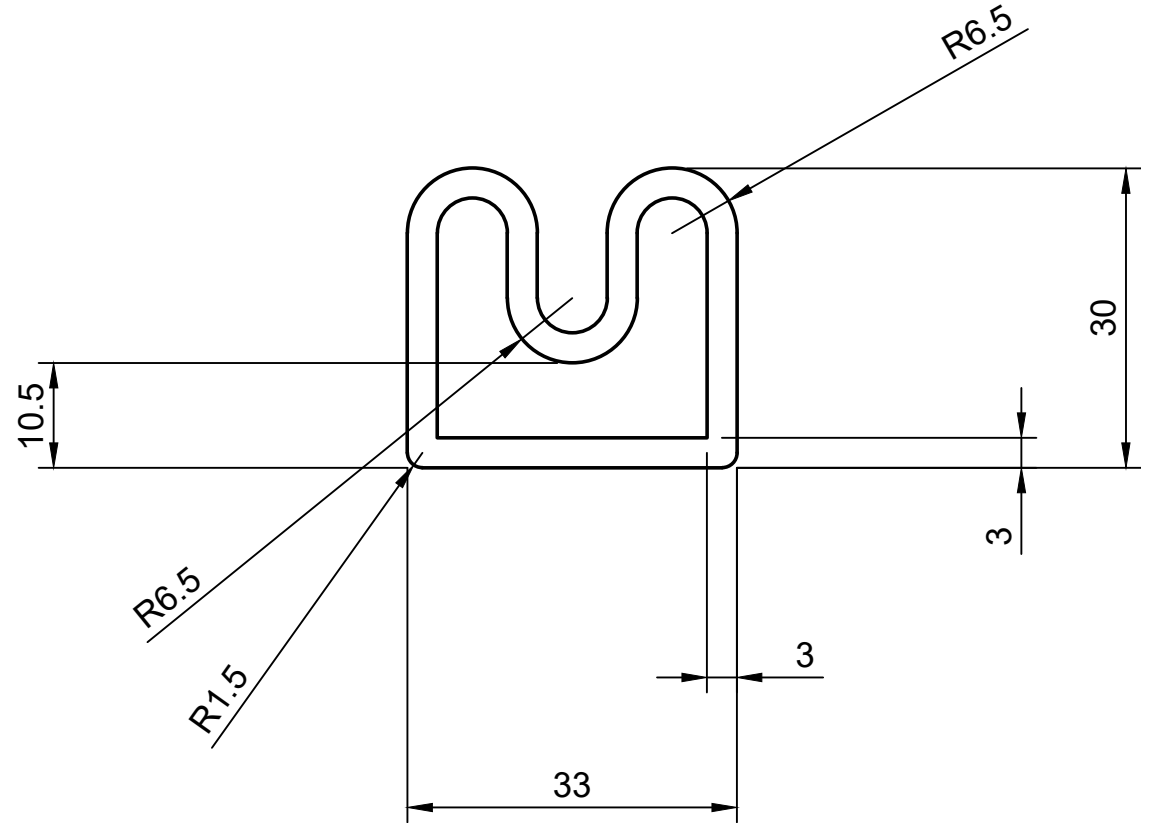


CHANNEL FIT INFLATABLE SEAL PROFILE

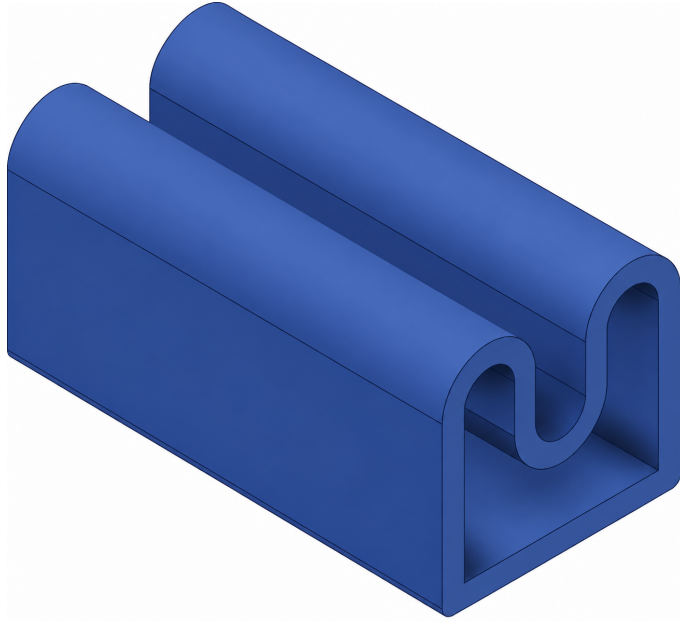

Inflated height (mm)	42	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1					
Cross-sectional area (mm²)	401				ISO 3302-1: 2014 E3										
Weight (kg/m)	0.521				Material			Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			
INFLATION PRESSURE (bar)					0.0	1.5		0.40	Hardness: 60 Shore A	Colour: Natural	Projection 	Revision No: 0		Scale: -	
Recommended	1.38				1.5	2.5		0.50				Channel Fit Inflatable Seal Profile			
Maximum	1.72				2.5	4.0		0.70	Profile No. 4008						
MIN. BEND RADIUS (mm)					4.0	6.3		0.80							
Radially inward	140				6.3	10.0		1.00							
Radially outward	140				10.0	16.0		1.30							
Axial	240				16.0	25.0		1.60							



Beykent Industrial Estate

141 Sakarya Street
Buyukcekmece / Istanbul
Turkey
+90 538 840 29 87

info@inflatablegaskets.com
www.inflatablegaskets.com

Prepared by Çınar Silikon
Mam. San. ve Tic. Ltd. Şti.
Reproduction or sharing
with third parties requires
prior written permission.

info@cinarsilikon.com
www.cinarsilikon.com