
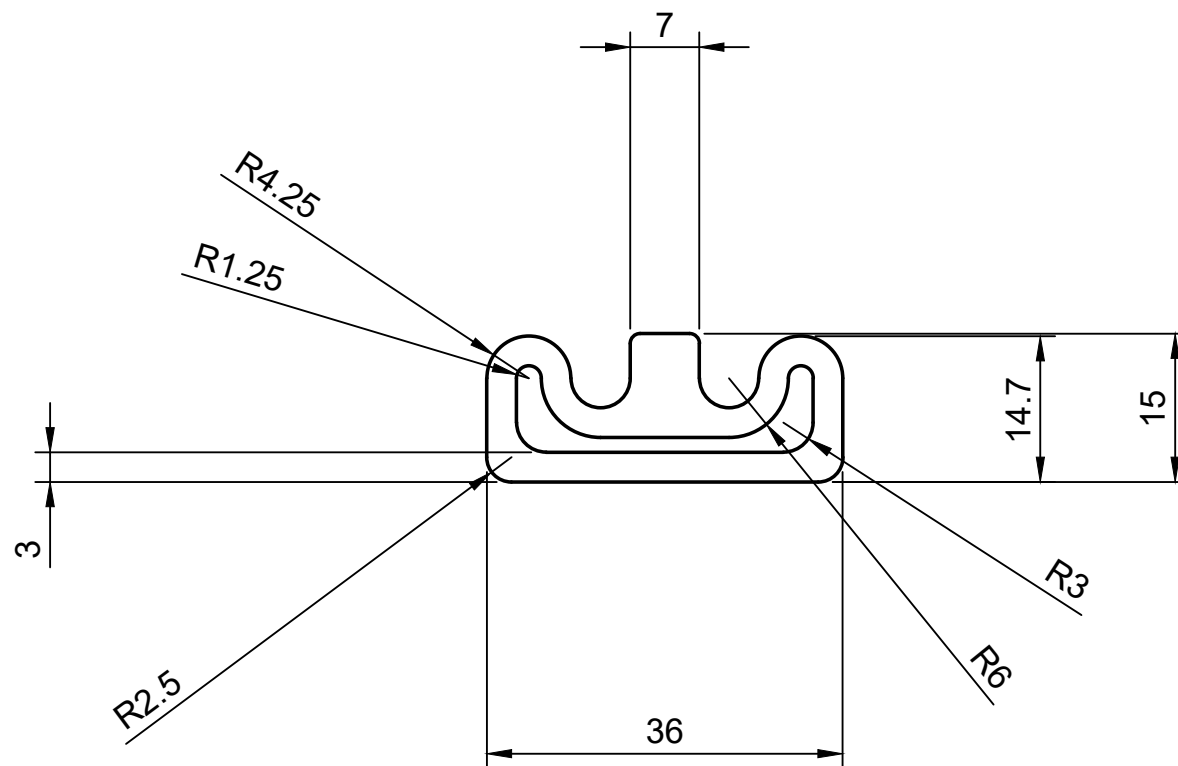




Inflated height (mm)	20	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 : 1/1			
Cross-sectional area (mm²)	343				ISO 3302-1: 2014 E3					Drawn by Serhat Çınar		Approved by Arif Çınar	
Weight (kg/m)	0.446	0.0	1.5	0.40	Material Silicone rubber								
INFLATION PRESSURE (bar)		1.5	2.5	0.50									
		2.5	4.0	0.70									
Recommended	1.38	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural								
Maximum	1.38	6.3	10.0	1.00									
MIN. BEND RADIUS (mm)		10.0	16.0	1.30	Projection 								
		16.0	25.0	1.60									
Radially inward	100	25.0	40.0	2.00			Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	Revision No: 0		Scale: -		
Radially outward	100	40.0	63.0	2.50									
		63.0	100.0	3.20									
Axial	250	100.0	-	3.2%									
INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS												Flexible Sidewall Inflatable Seal Profile 4010	