
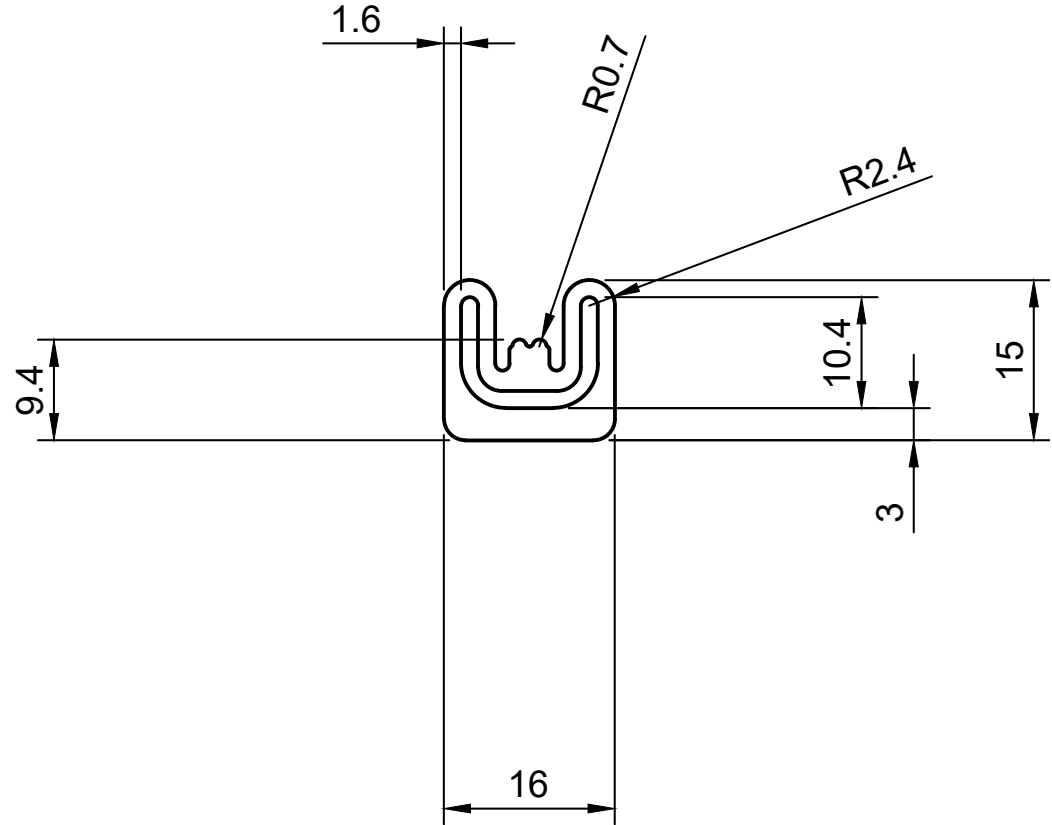
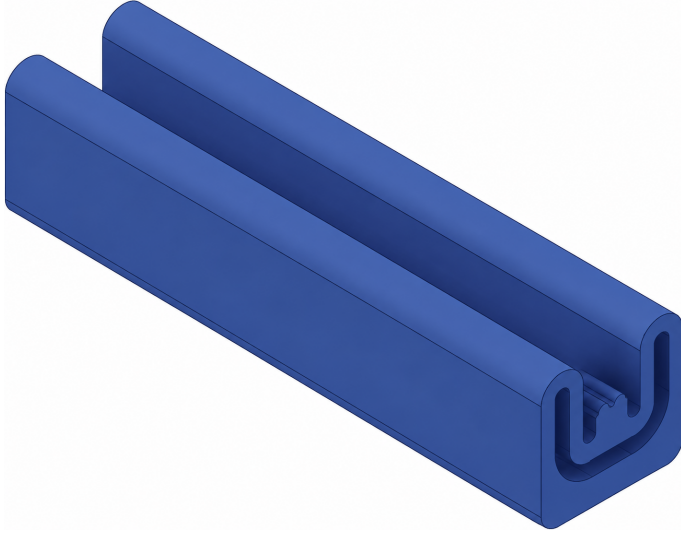


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	26	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1					
Cross-sectional area (mm²)	147				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar					
Weight (kg/m)	0.191				Material Silicone rubber			Hardness: 60 Shore A Colour: Natural		Beykent Industrial Estate 141 Sakarya Street Büyükcemece / İstanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			
INFLATION PRESSURE (bar)															
Recommended	0.69														
Maximum	1.03														
MIN. BEND RADIUS (mm)					Projection 			Flexible Sidewall Inflatable Seal Profile							
Radially inward	100													Profile No. 4272	
Radially outward	40														
Axial	80														