
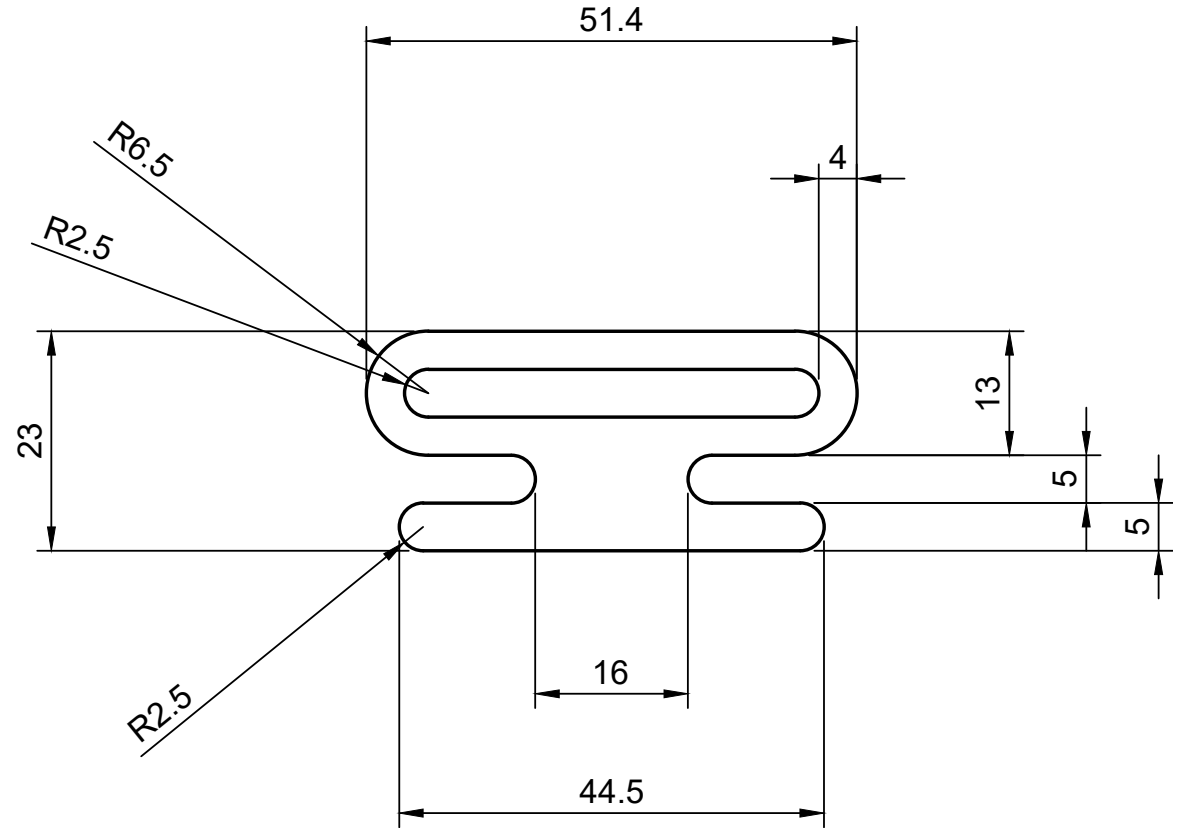
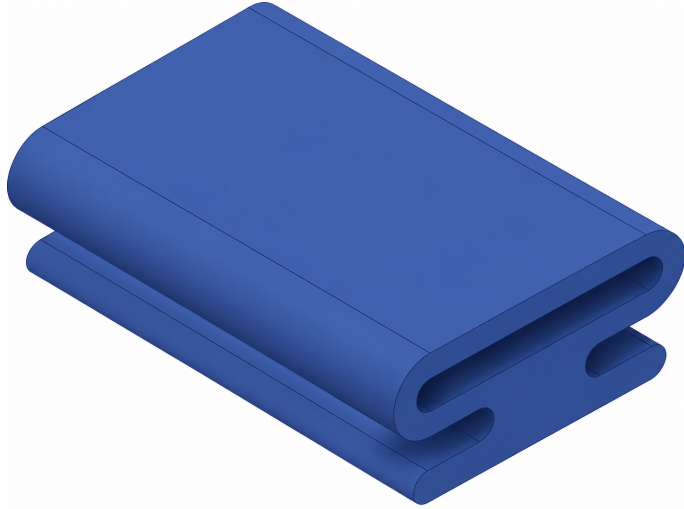


STEM FOOT INFLATABLE SEAL PROFILE



Inflated height (mm)	42	Over Nominal size Up to and including Tolerance E3 +/-	Manufacturing tolerance		INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1		
Cross-sectional area (mm²)	723		ISO 3302-1: 2014 E3			Drawn by Serhat Çınar	Approved by Arif Çınar			
Weight (kg/m)	0.940		Material							
INFLATION PRESSURE (bar)			Silicone rubber							
Recommended	1.38		0.0	1.5		0.40	Hardness: 60 Shore A	Colour: Natural	Revision No: 0	Scale: -
Maximum	1.72		1.5	2.5		0.50				
MIN. BEND RADIUS (mm)			2.5	4.0		0.70	Projection 	Stem Foot Inflatable Seal Profile		
Radially inward	280		4.0	6.3		0.80				
Radially outward	275		6.3	10.0		1.00				
Axial	485	10.0	16.0	1.30						
		16.0	25.0	1.60						
		25.0	40.0	2.00	Beykent Industrial Estate		Prepared by Çınar Silikon			
		40.0	63.0	2.50	141 Sakarya Street		Mam. San. ve Tic. Ltd. Şti.			
		63.0	100.0	3.20	Buyukcekmece / Istanbul		Reproduction or sharing			
		100.0	-	3.2%	Turkey		with third parties requires			
					+90 538 840 29 87		prior written permission.			
					info@inflatablegaskets.com		info@cinarsilikon.com			
					www.inflatablegaskets.com		www.cinarsilikon.com			
							Profile No.			
							4418			