
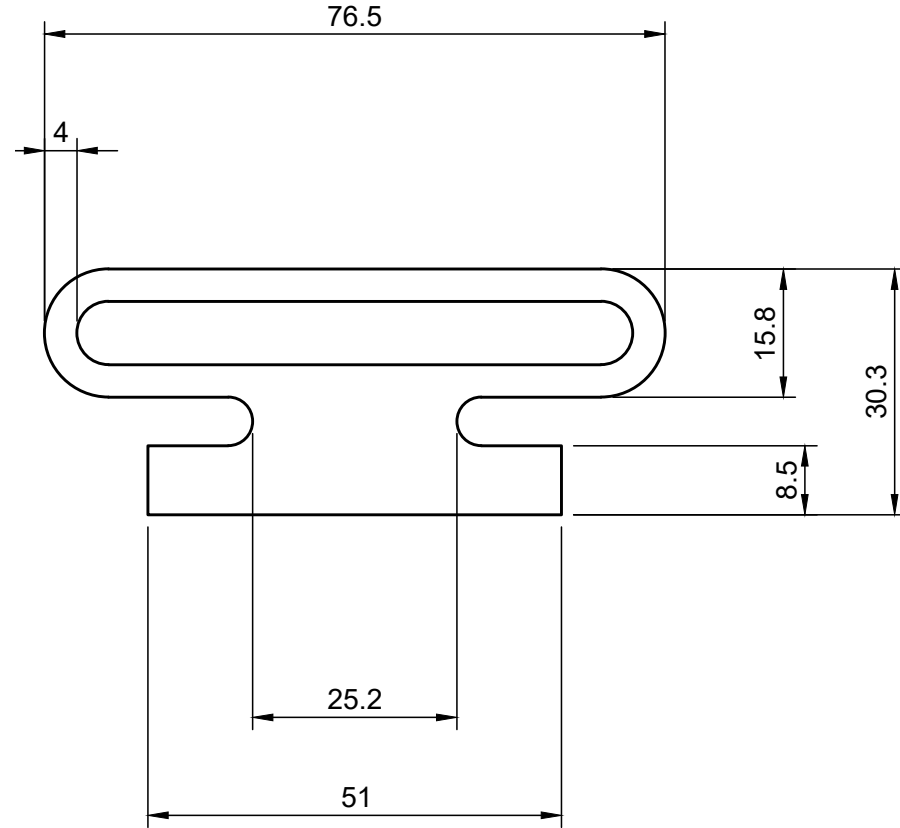
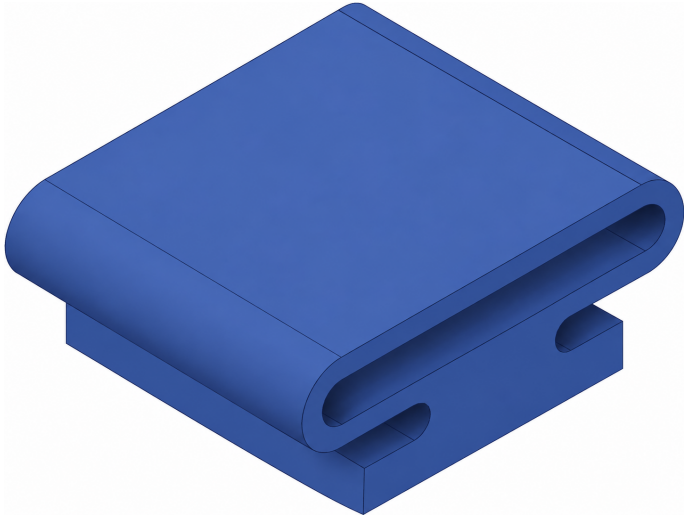


STEM FOOT INFLATABLE SEAL PROFILE



Inflated height (mm)	63	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1					
Cross-sectional area (mm²)	1226				ISO 3302-1: 2014 E3										
Weight (kg/m)	1.594				Material Silicone rubber			Hardness: 60 Shore A Colour: Natural		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Drawn by Serhat Çınar		Approved by Arif Çınar	
INFLATION PRESSURE (bar)												Revision No: 0		Scale: -	
Recommended	0.69											Stem Foot Inflatable Seal Profile			
Maximum	1.03														
MIN. BEND RADIUS (mm)															
Radially inward	150	0.0	1.5	0.40			Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com								
Radially outward	150	1.5	2.5	0.50											
		2.5	4.0	0.70											
Axial	150	4.0	6.3	0.80											
		6.3	10.0	1.00											
		10.0	16.0	1.30											
		16.0	25.0	1.60											
		25.0	40.0	2.00											
		40.0	63.0	2.50											
		63.0	100.0	3.20											
		100.0	-	3.2%											