
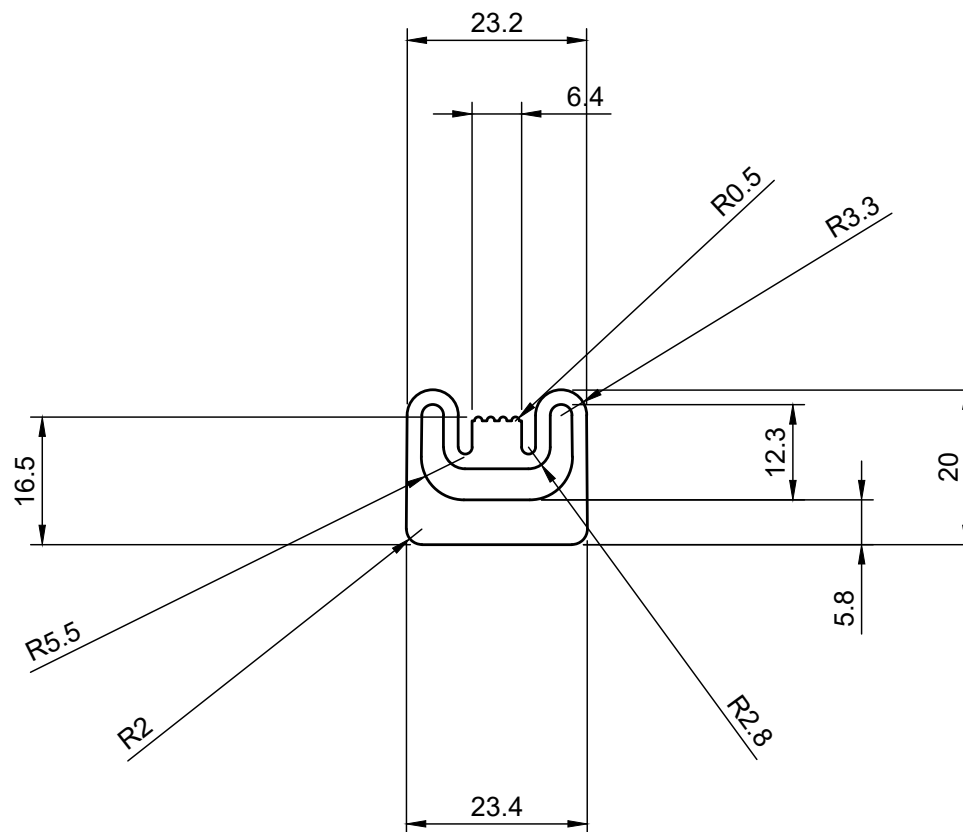
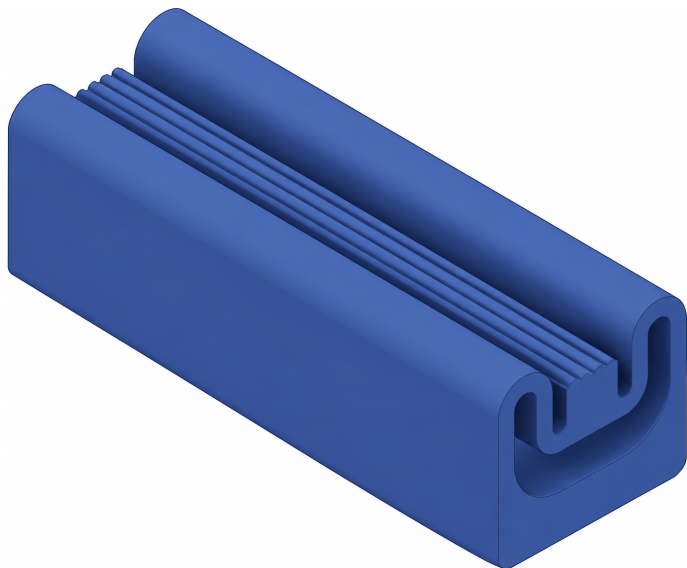



FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	35	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance			Date 09.09.2026	Page A4 · 1/1			
Cross-sectional area (mm²)	176				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar	Approved by Arif Çınar			
Weight (kg/m)	0.229	0.0	1.5	0.40	Material Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Büyücekmece / İstanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	Revision No: 0	Scale: -		
INFLATION PRESSURE (bar)		1.5	2.5	0.50							Hardness: 60 Shore A	Colour: Natural
		2.5	4.0	0.70								
Recommended	1.24	4.0	6.3	0.80	Projection 				Flexible Sidewall Inflatable Seal Profile			
Maximum	1.38	6.3	10.0	1.00								
MIN. BEND RADIUS (mm)		10.0	16.0	1.30					Profile No. 4725			
		16.0	25.0	1.60								
Radially inward	120	25.0	40.0	2.00								
Radially outward	120	40.0	63.0	2.50								
Axial	130	63.0	100.0	3.20								
		100.0	-	3.2%								