
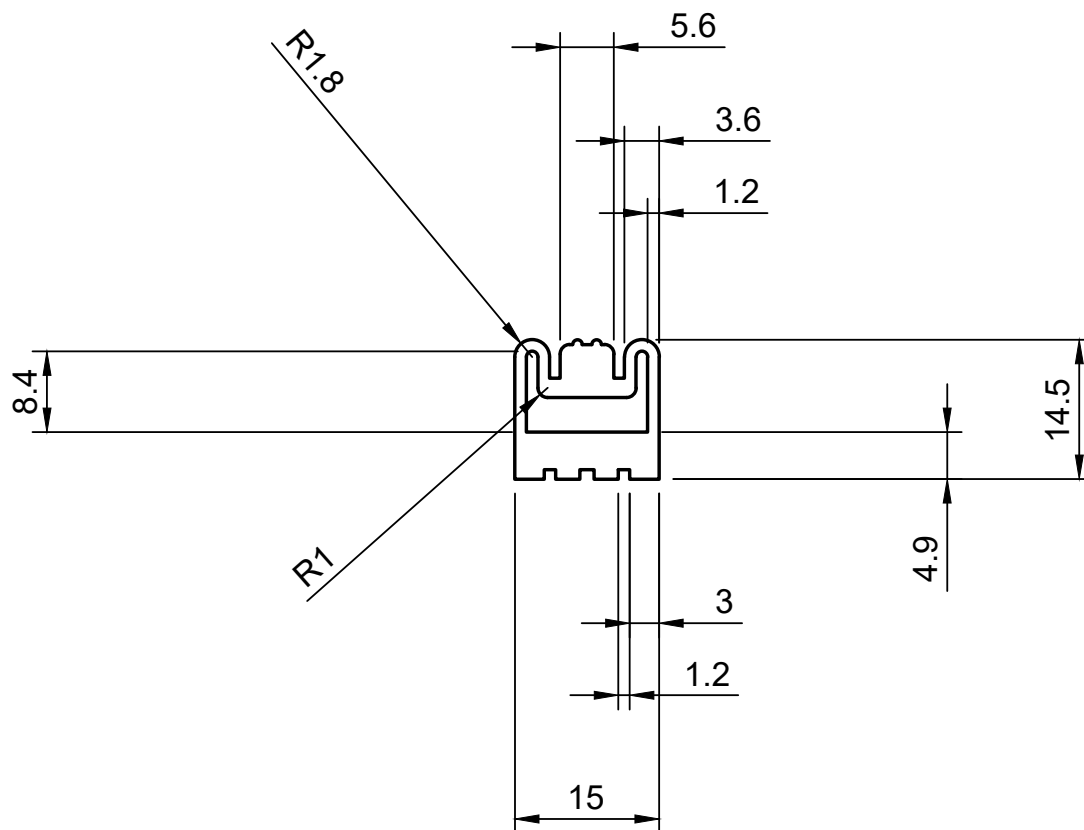
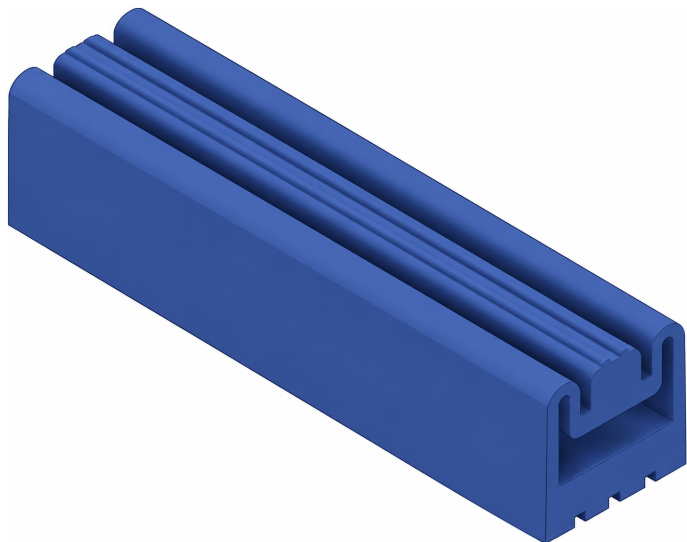


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	20	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1			
Cross-sectional area (mm²)	143				ISO 3302-1: 2014 E3			Material Silicone rubber		Drawn by Serhat Çınar		Approved by Arif Çınar	
Weight (kg/m)	0.186				Hardness: 60 Shore A Colour: Natural								
INFLATION PRESSURE (bar)													
Recommended	0.69												
Maximum	1.03												
MIN. BEND RADIUS (mm)								Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			
Radially inward	100												
Radially outward	100												
Axial	170												
								Revision No: 0		Scale: -			
								Flexible Sidewall Inflatable Seal Profile					
								Profile No.					
								4732					