
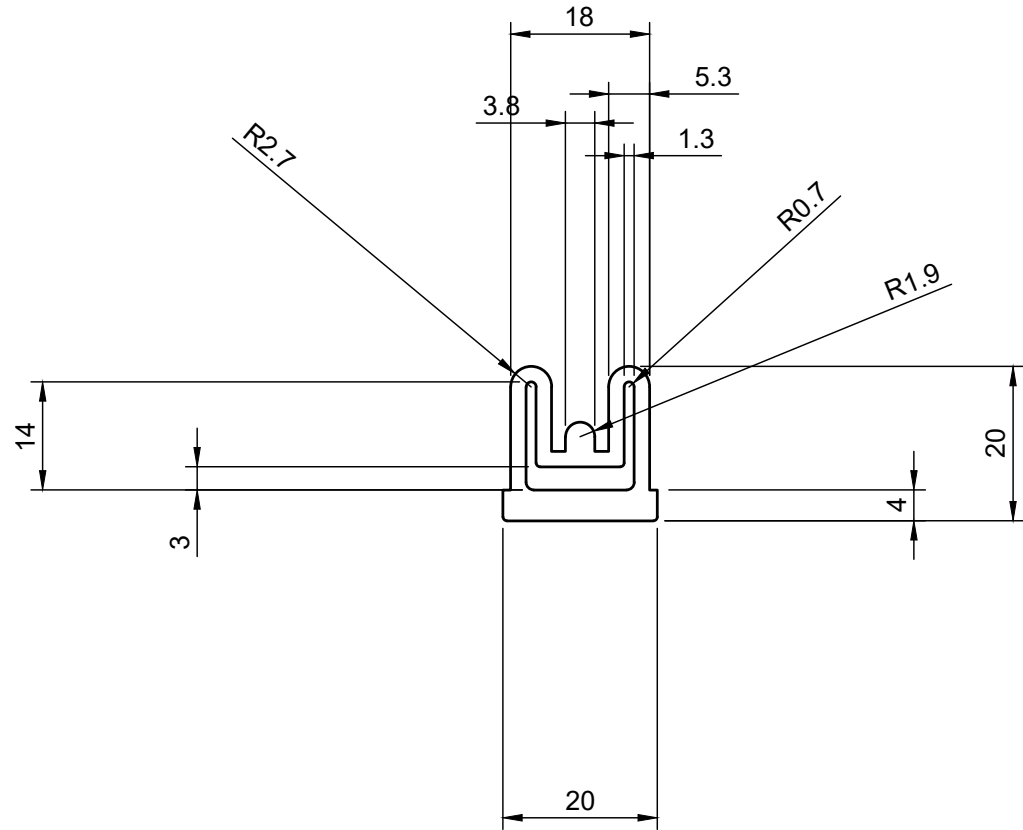
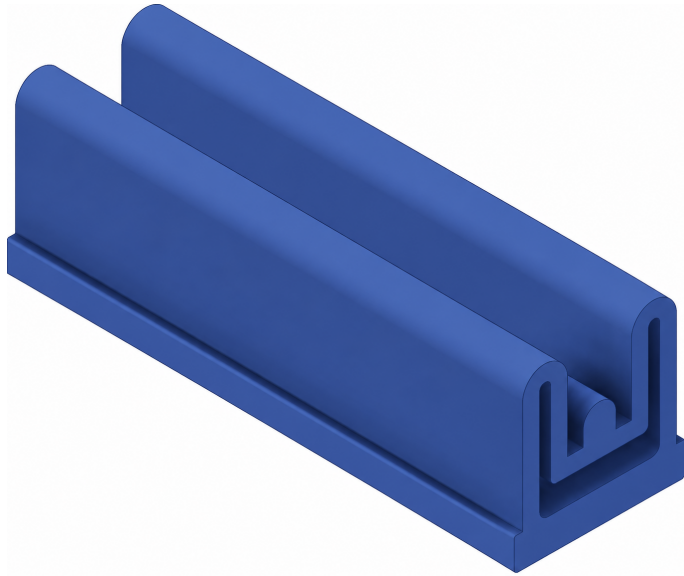


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	25	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026	Page A4 · 1/1	
Cross-sectional area (mm²)	224				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar	Approved by Arif Çınar	
Weight (kg/m)	0.291	0.0	1.5	0.40	Material Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Büyükcemece / İstanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	Revision No: 0	Scale: -
INFLATION PRESSURE (bar)		1.5	2.5	0.50						
		2.5	4.0	0.70						
Recommended	1.24	4.0	6.3	0.80	Hardness: 60 Shore A	Colour: Natural			Flexible Sidewall Inflatable Seal Profile	
Maximum	1.52	6.3	10.0	1.00						
MIN. BEND RADIUS (mm)		10.0	16.0	1.30		Profile No. 5124				
		16.0	25.0	1.60						
Radially inward	250	25.0	40.0	2.00						
Radially outward	250	40.0	63.0	2.50						
		63.0	100.0	3.20						
Axial	300	100.0	-	3.2%						