
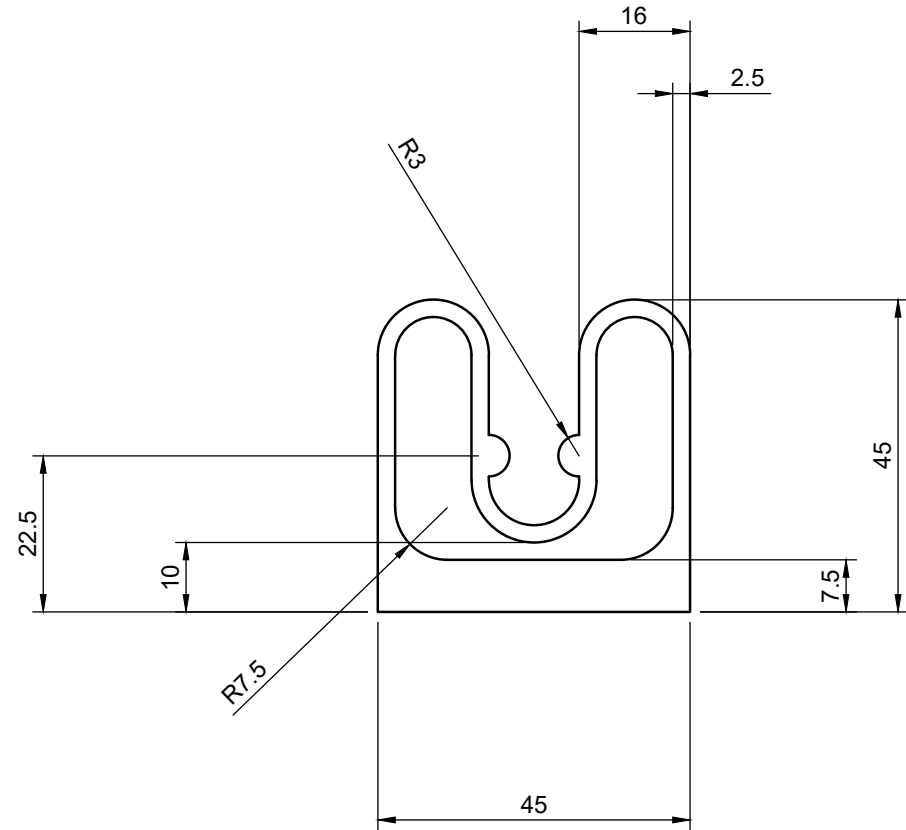
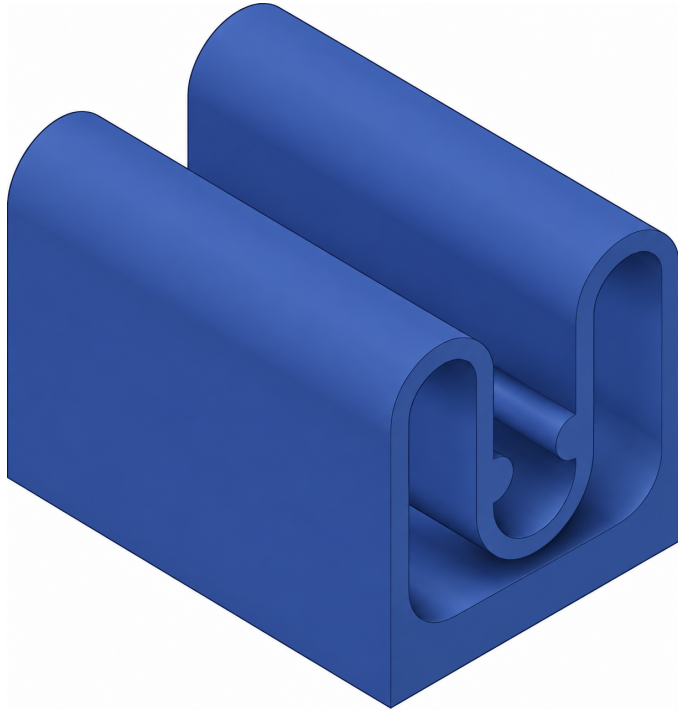


CHANNEL FIT INFLATABLE SEAL PROFILE



Inflated height (mm)	70	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1				
Cross-sectional area (mm²)	794				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar				
Weight (kg/m)	1.032				0.0	1.5		0.40	Material Silicone rubber		Revision No: 0		Scale: -	
INFLATION PRESSURE (bar)					1.5	2.5		0.50						
					2.5	4.0		0.70						
Recommended	0.55				4.0	6.3		0.80	Hardness: 60 Shore A Colour: Natural		Beykent Industrial Estate 141 Sakarya Street Buyukçekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	
Maximum	0.69				6.3	10.0		1.00						
MIN. BEND RADIUS (mm)					10.0	16.0		1.30	Projection 		Channel Fit Inflatable Seal Profile			
					16.0	25.0		1.60						
Radially inward	300				25.0	40.0		2.00	Profile No. 5592					
Radially outward	300	40.0	63.0	2.50										
Axial	Not specified	63.0	100.0	3.20										
		100.0	-	3.2%										