
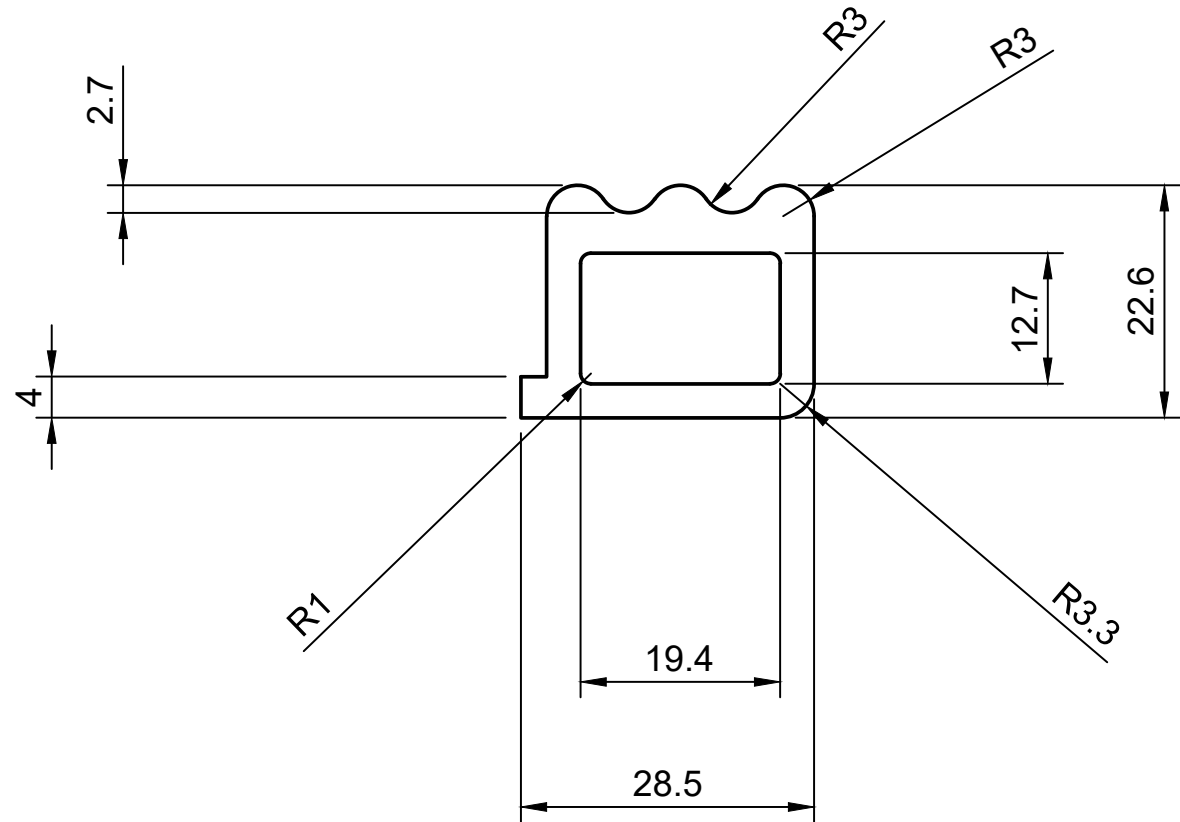


CASTELLATED INFLATABLE SEAL PROFILE

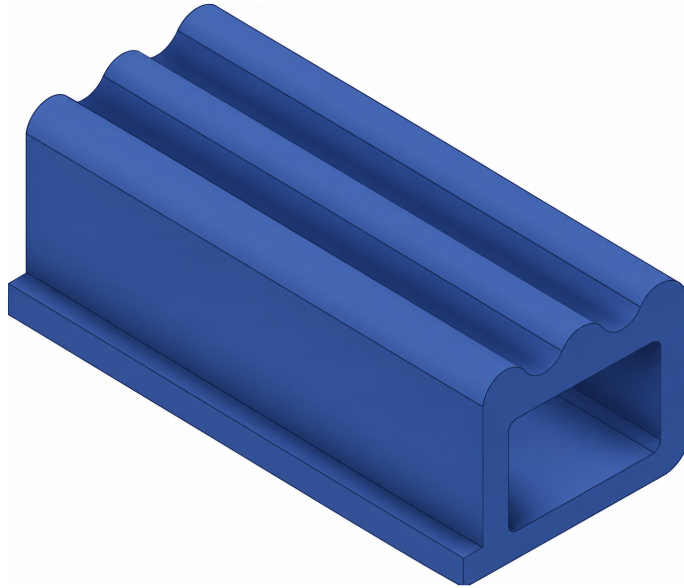

Inflated height (mm)	25.5	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1					
Cross-sectional area (mm²)	319				ISO 3302-1: 2014 E3										
Weight (kg/m)	0.415				Material					Drawn by Serhat Çınar		Approved by Arif Çınar			
INFLATION PRESSURE (bar)					Silicone rubber										
Recommended	0.69				Hardness: 60 Shore A			Colour: Natural				Revision No: 0		Scale: -	
Maximum	0.83				Projection										
MIN. BEND RADIUS (mm)															
Radially inward	425														
Radially outward	220														
Axial	390														
					Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com			Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			Castellated Inflatable Seal Profile Profile No. 5917				