
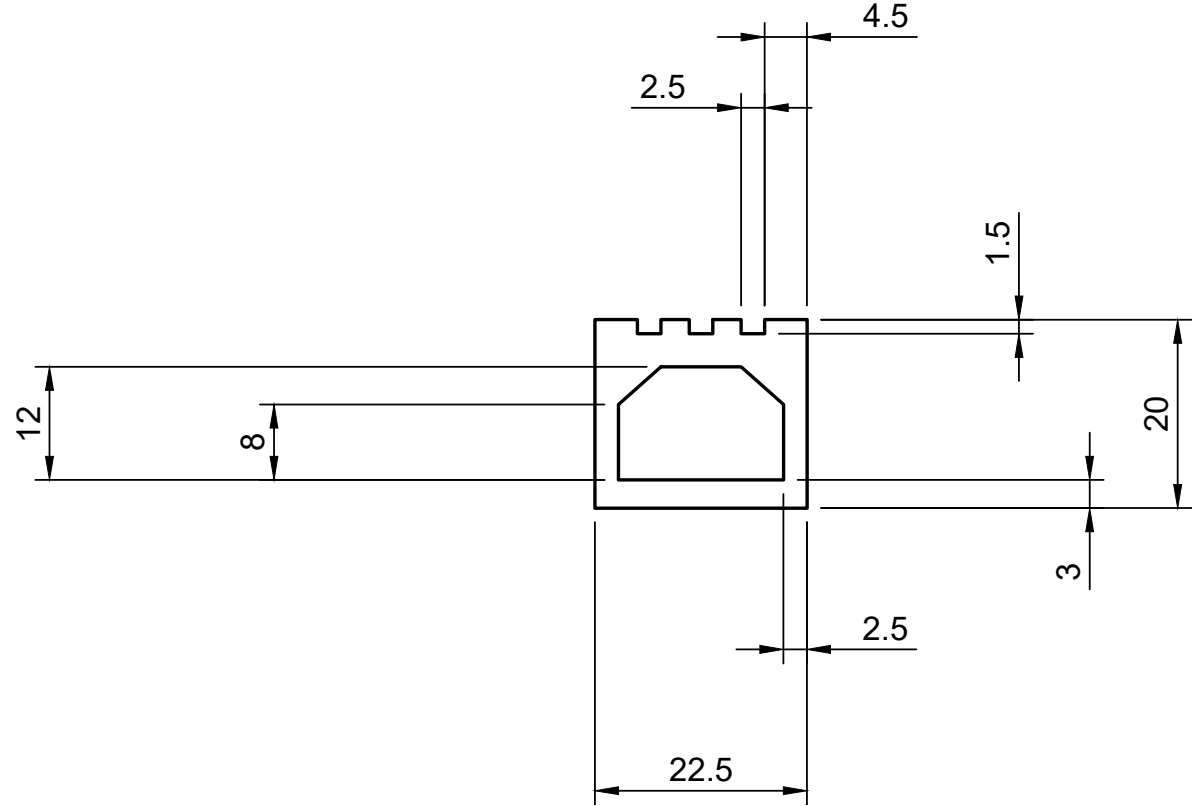
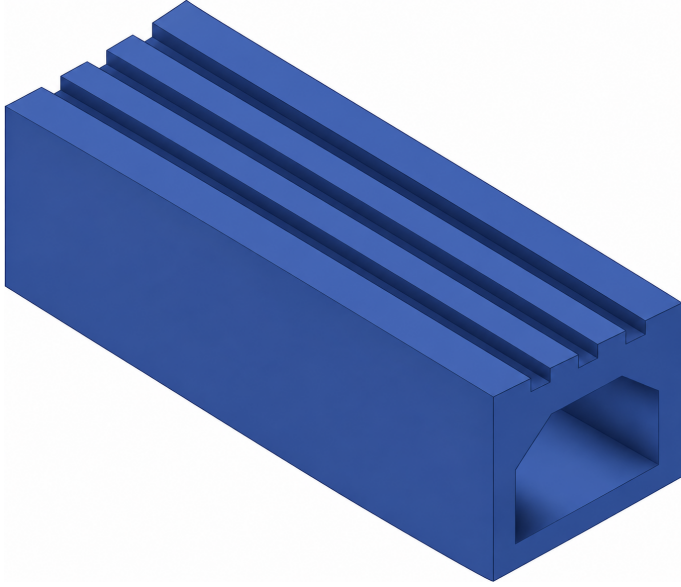


CASTELLATED INFLATABLE SEAL PROFILE



Inflated height (mm)	23	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1			
Cross-sectional area (mm²)	247				ISO 3302-1: 2014 E3								
Weight (kg/m)	0.321	0.0	1.5	0.40	Material Silicone rubber			Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	Drawn by Serhat Çınar		Approved by Arif Çınar	
INFLATION PRESSURE (bar)		1.5	2.5	0.50									
Recommended		2.5	4.0	0.70									
Maximum		4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural					Revision No: 0		Scale: -	
MIN. BEND RADIUS (mm)		6.3	10.0	1.00									
Radially inward		10.0	16.0	1.30	Projection 					Castellated Inflatable Seal Profile			
Radially outward		16.0	25.0	1.60									
Axial		25.0	40.0	2.00						Profile No. 5926			
Not specified		40.0	63.0	2.50									
		63.0	100.0	3.20									
		100.0	-	3.2%									