

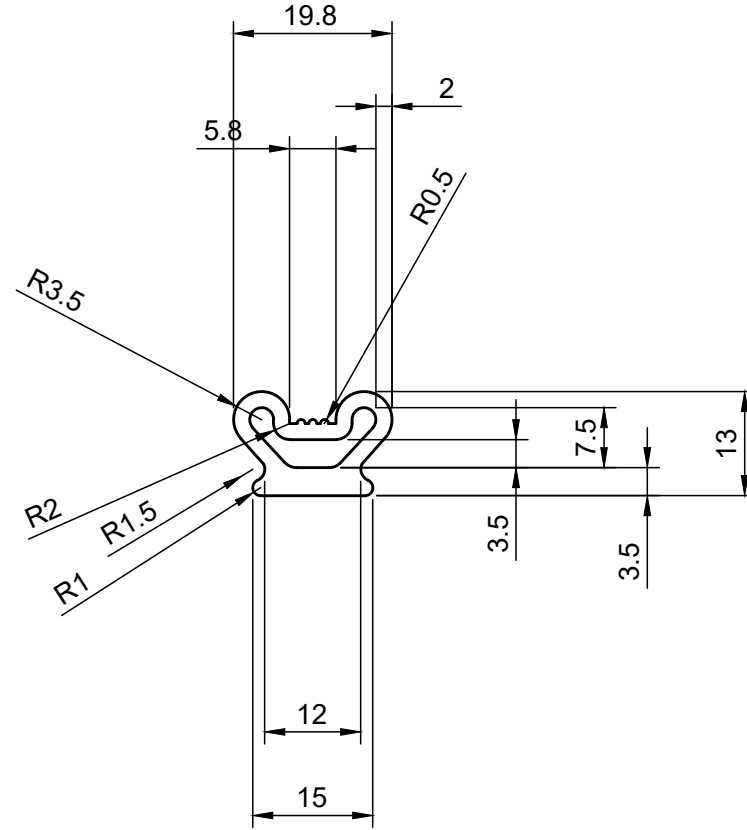


SNAP-IN BASE INFLATABLE SEAL PROFILE

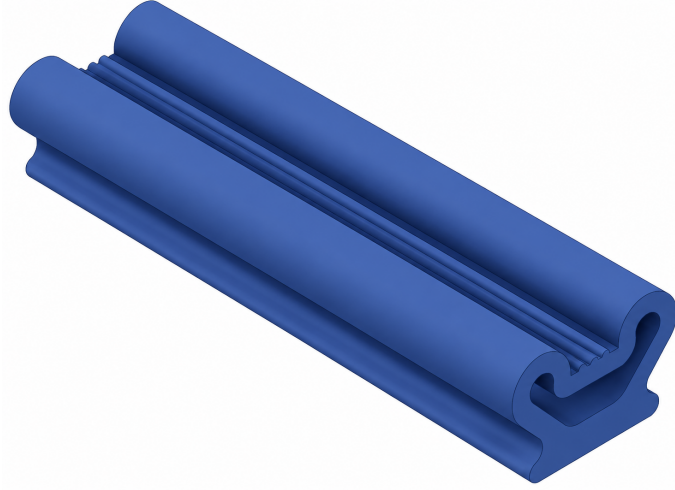

Inflated height (mm)	17	Over Nominal size Up to and including Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1		
Cross-sectional area (mm²)	132		ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar		
Weight (kg/m)	0.172		Material Silicone rubber							
INFLATION PRESSURE (bar)										0.0
						1.5	2.5	0.50		
Recommended	0.69		2.5	4.0		0.70	Hardness: 60 Shore A		Colour: Natural	
Maximum	0.97		4.0	6.3		0.80				
MIN. BEND RADIUS (mm)			6.3	10.0		1.00	Projection			
			10.0	16.0		1.30				
Radially inward	150	16.0	25.0	1.60	Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			
Radially outward	150	25.0	40.0	2.00						
Axial	280	40.0	63.0	2.50						
		63.0	100.0	3.20			Profile No. 5974			
		100.0	-	3.2%						



Beykent Industrial Estate

141 Sakarya Street
Buyukcekmece / Istanbul
Turkey
+90 538 840 29 87

info@inflatablegaskets.com
www.inflatablegaskets.com

Prepared by Çınar Silikon
Mam. San. ve Tic. Ltd. Şti.
Reproduction or sharing
with third parties requires
prior written permission.

info@cinarsilikon.com
www.cinarsilikon.com