
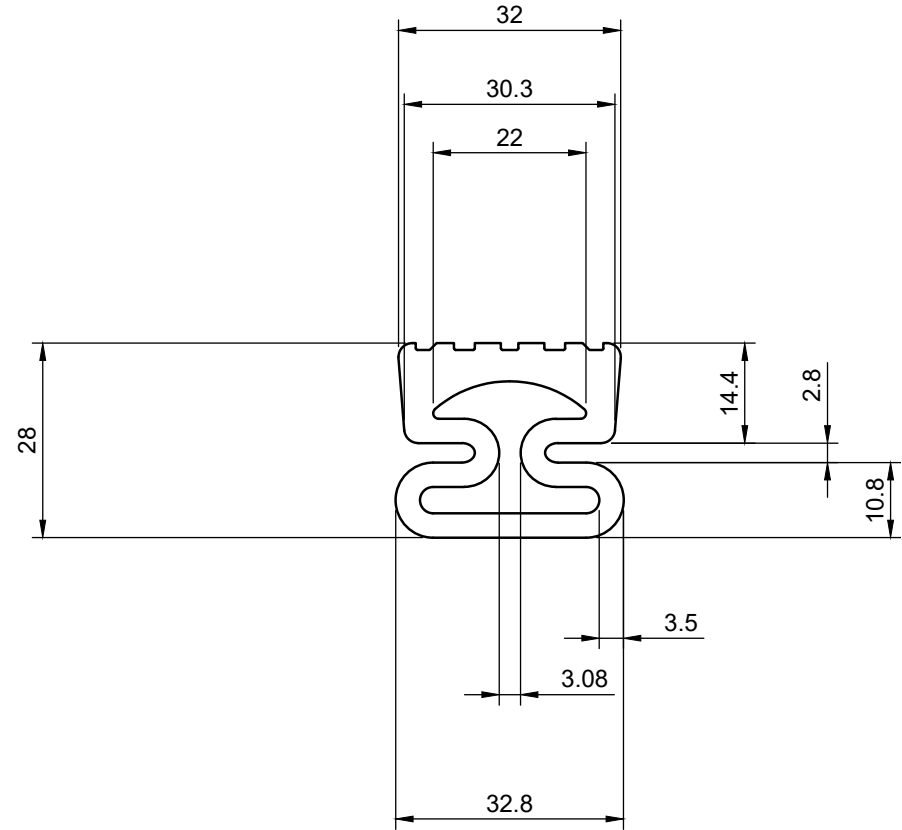
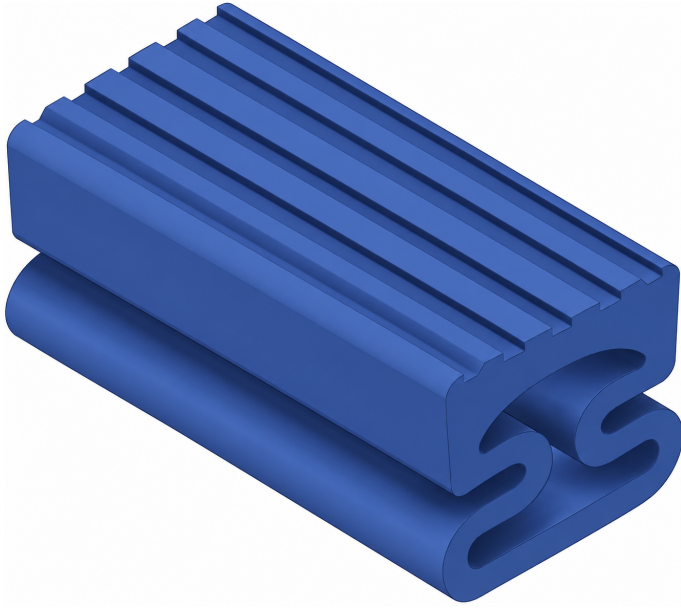


CUSTOM SECTION INFLATABLE SEAL PROFILE



Inflated height (mm)	37	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1	
Cross-sectional area (mm²)	556				ISO 3302-1: 2014 E3					Drawn by Serhat Çınar	
Weight (kg/m)	0.723	0.0	1.5	0.40	Material Silicone rubber						
INFLATION PRESSURE (bar)		1.5	2.5	0.50							
		2.5	4.0	0.70							
Recommended	0.69	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural				Revision No: 0	Scale: -	
Maximum	1.03	6.3	10.0	1.00							
MIN. BEND RADIUS (mm)		10.0	16.0	1.30	Projection					Custom Section Inflatable Seal Profile	
		16.0	25.0	1.60							
Radially inward	280	25.0	40.0	2.00						Profile No. 6044	
Radially outward	160	40.0	63.0	2.50							
		63.0	100.0	3.20							
Axial	250	100.0	-	3.2%							
					Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com			Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			