

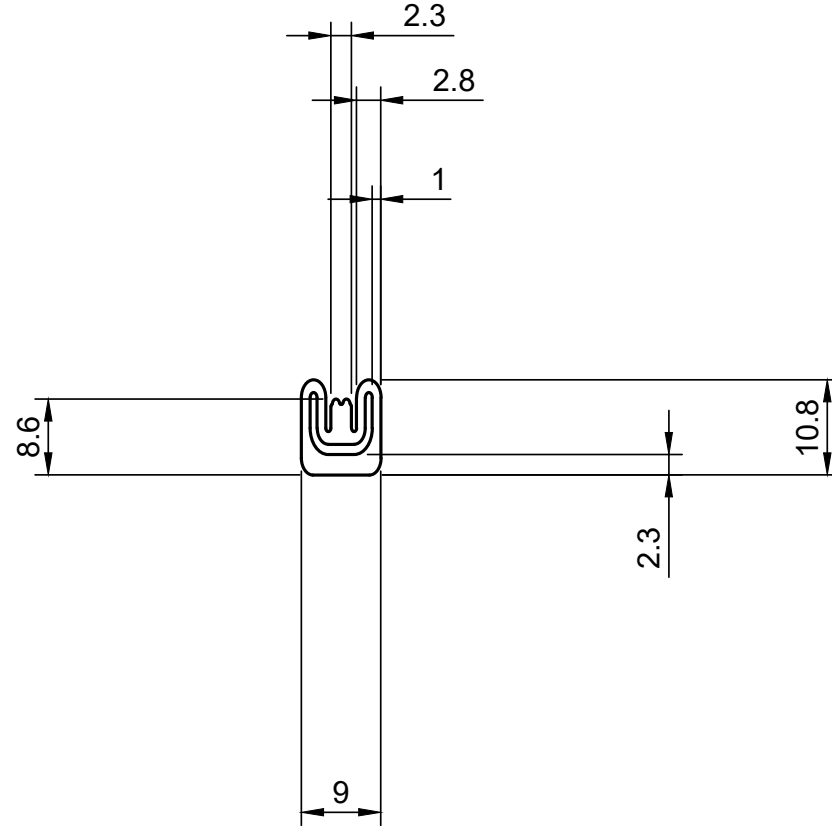


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE

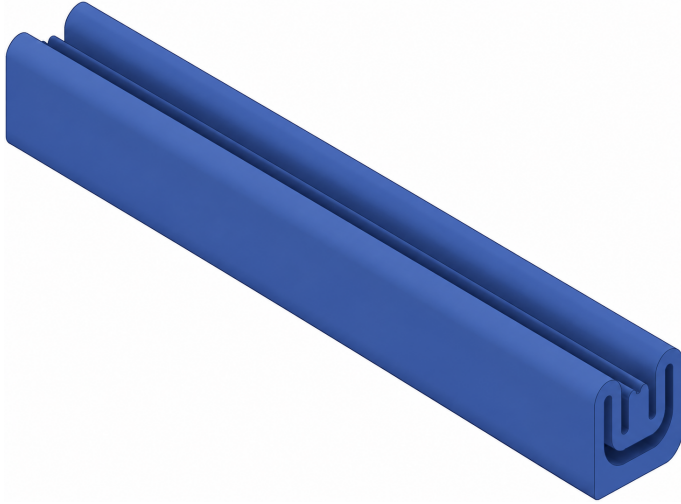

Inflated height (mm)	14	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1	
Cross-sectional area (mm²)	66				ISO 3302-1: 2014 E3						
Weight (kg/m)	0.086	0.0	1.5	0.40	Material Silicone rubber			Drawn by Serhat Çınar	Approved by Arif Çınar		
INFLATION PRESSURE (bar)		1.5	2.5	0.50							
		2.5	4.0	0.70							
Recommended	0.83	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural			Revision No: 0	Scale: -		
Maximum	0.97	6.3	10.0	1.00							
MIN. BEND RADIUS (mm)		10.0	16.0	1.30	Projection				Flexible Sidewall Inflatable Seal Profile		
		16.0	25.0	1.60							
Radially inward	150	25.0	40.0	2.00				Profile No.	6499		
Radially outward	150	40.0	63.0	2.50							
		63.0	100.0	3.20							
Axial	100	100.0	-	3.2%							
					Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com			Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			



Beykent Industrial Estate

141 Sakarya Street
Buyukcekmece / Istanbul
Turkey
+90 538 840 29 87

info@inflatablegaskets.com
www.inflatablegaskets.com

Prepared by Çınar Silikon
Mam. San. ve Tic. Ltd. Şti.
Reproduction or sharing
with third parties requires
prior written permission.

info@cinarsilikon.com
www.cinarsilikon.com