
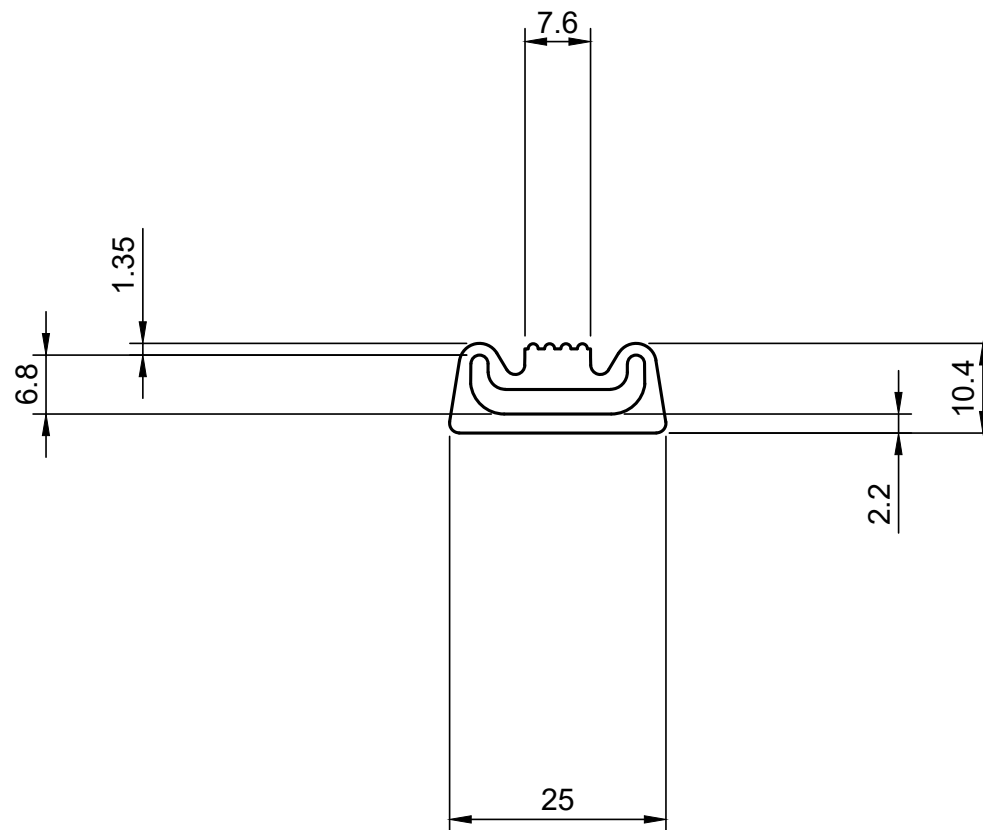
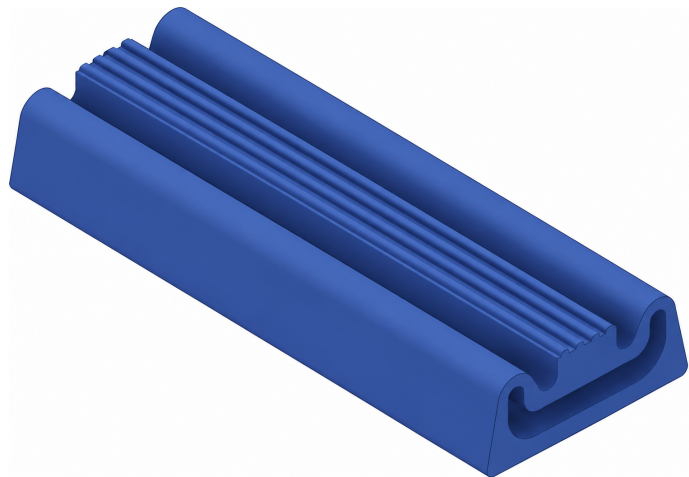
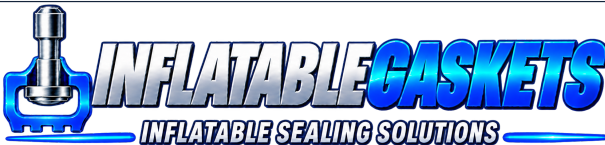


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	15	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance			Date 09.09.2026		Page A4 · 1/1	
Cross-sectional area (mm²)	153				ISO 3302-1: 2014 E3						
Weight (kg/m)	0.199				Material Silicone rubber			Hardness: 60 Shore A Colour: Natural		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	
INFLATION PRESSURE (bar)											
Recommended	1.03										
Maximum	1.24										
MIN. BEND RADIUS (mm)					0.0	1.5		0.40	Projection 		
					1.5	2.5		0.50			
					2.5	4.0		0.70			
					4.0	6.3		0.80			
		6.3	10.0	1.00							
		10.0	16.0	1.30							
		16.0	25.0	1.60	Flexible Sidewall Inflatable Seal Profile						
		25.0	40.0	2.00							
		40.0	63.0	2.50							
		63.0	100.0	3.20							
		100.0	-	3.2%	Profile No.		6527				