
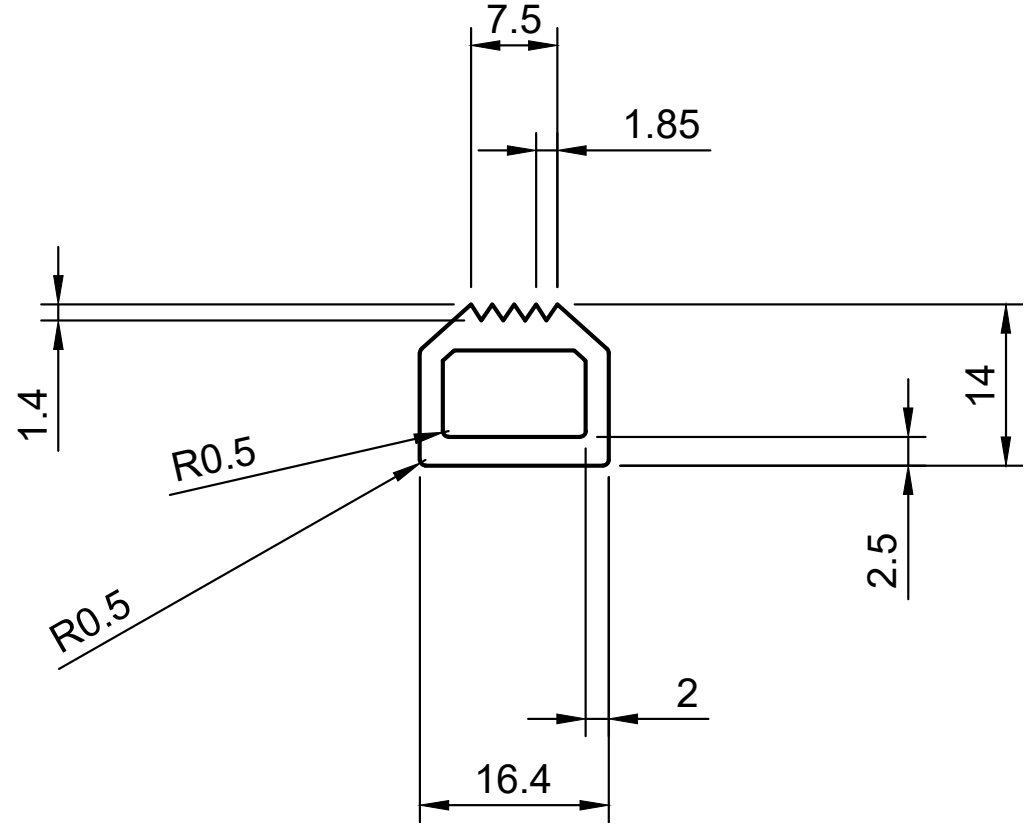
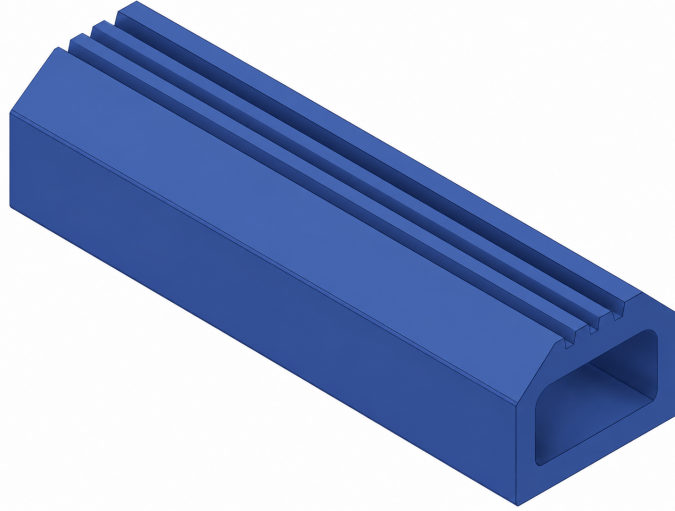


CASTELLATED INFLATABLE SEAL PROFILE



Inflated height (mm)	15	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026	Page A4 · 1/1				
Cross-sectional area (mm²)	114				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar	Approved by Arif Çınar				
Weight (kg/m)	0.148	0.0	1.5	0.40	Material Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	Revision No: 0	Scale: -			
INFLATION PRESSURE (bar)		1.5	2.5	0.50							Hardness: 60 Shore A	Colour: Natural	
		2.5	4.0	0.70									
Recommended	1.10	4.0	6.3	0.80	Projection 				Castellated Inflatable Seal Profile				
Maximum	1.38	6.3	10.0	1.00							Profile No. 6604		
MIN. BEND RADIUS (mm)		10.0	16.0	1.30									
		16.0	25.0	1.60									
Radially inward	70	25.0	40.0	2.00									
Radially outward	50	40.0	63.0	2.50									
		63.0	100.0	3.20									
Axial	80	100.0	-	3.2%									