
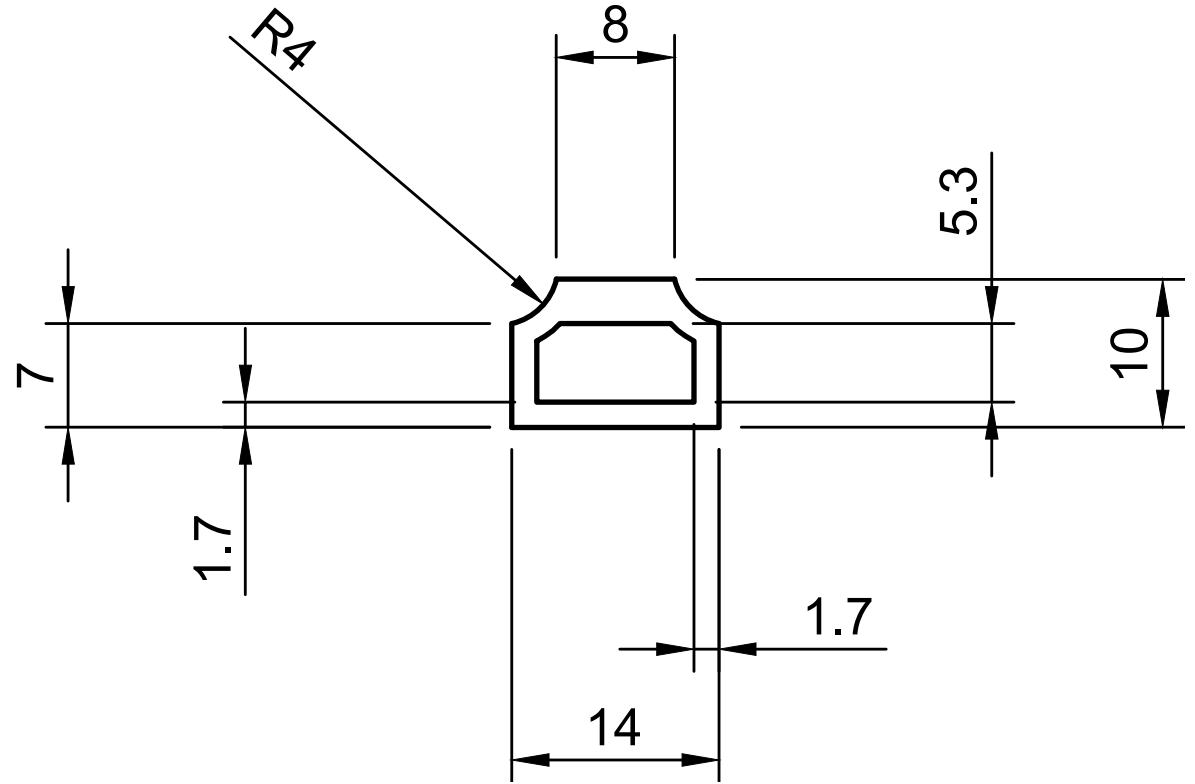
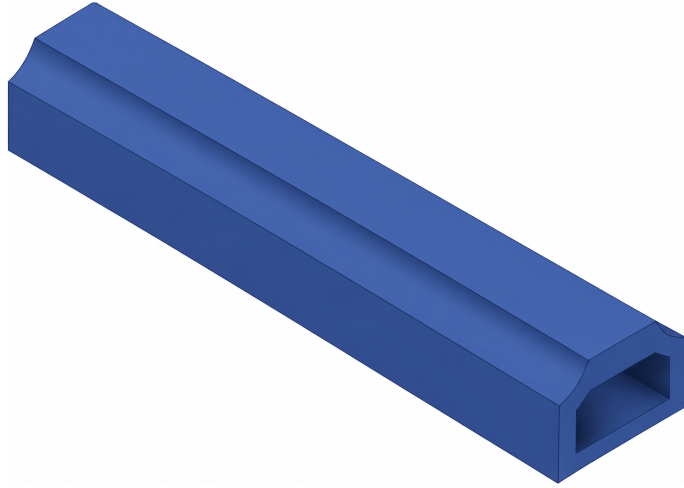


CASTELLATED INFLATABLE SEAL PROFILE



Inflated height (mm)	12	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1			
Cross-sectional area (mm²)	74				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar			
Weight (kg/m)	0.096				Material Silicone rubber			Hardness: 60 Shore A Colour: Natural		Revision No: 0 Scale: -		Castellated Inflatable Seal Profile Profile No. 6606	
INFLATION PRESSURE (bar)													
Recommended	1.03												
Maximum	1.38												
MIN. BEND RADIUS (mm)					Projection 			Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			
Radially inward	90												
Radially outward	90												
Axial	200												
		0.0	1.5	0.40									
		1.5	2.5	0.50									
		2.5	4.0	0.70									
		4.0	6.3	0.80									
		6.3	10.0	1.00									
		10.0	16.0	1.30									
		16.0	25.0	1.60									
		25.0	40.0	2.00									
		40.0	63.0	2.50									
		63.0	100.0	3.20									
		100.0	-	3.2%									