
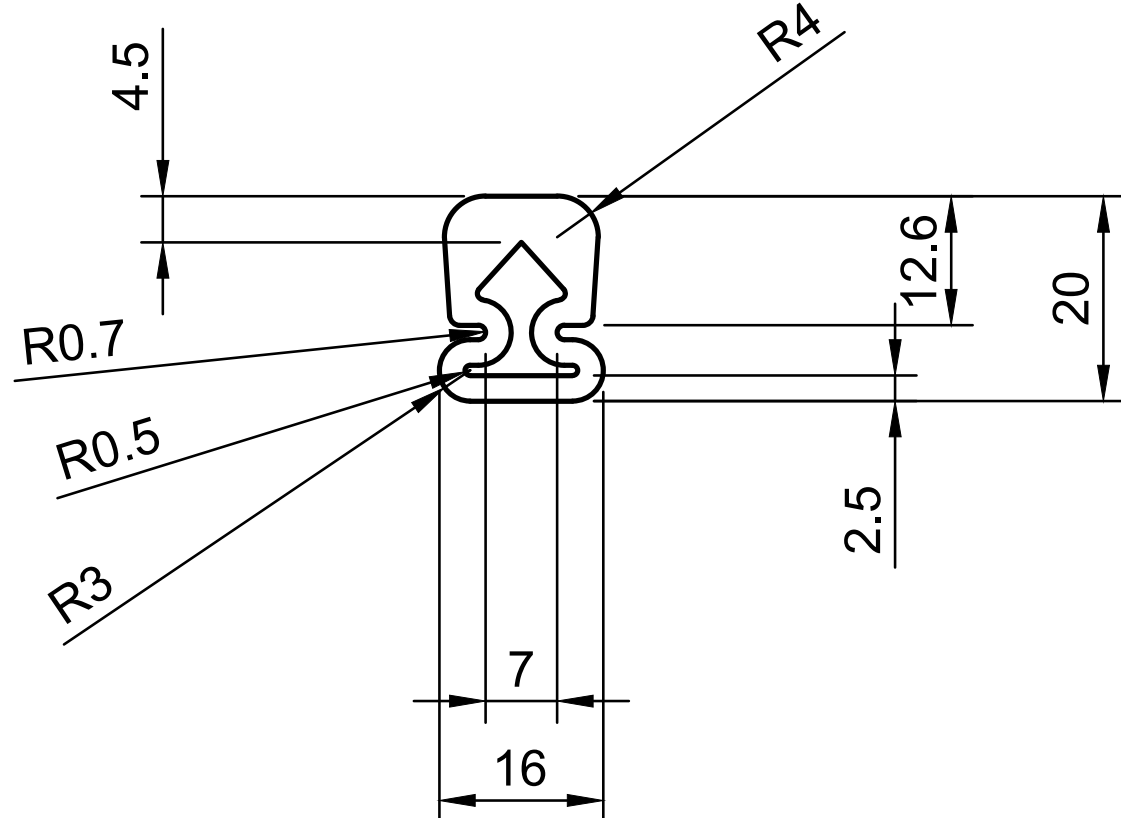
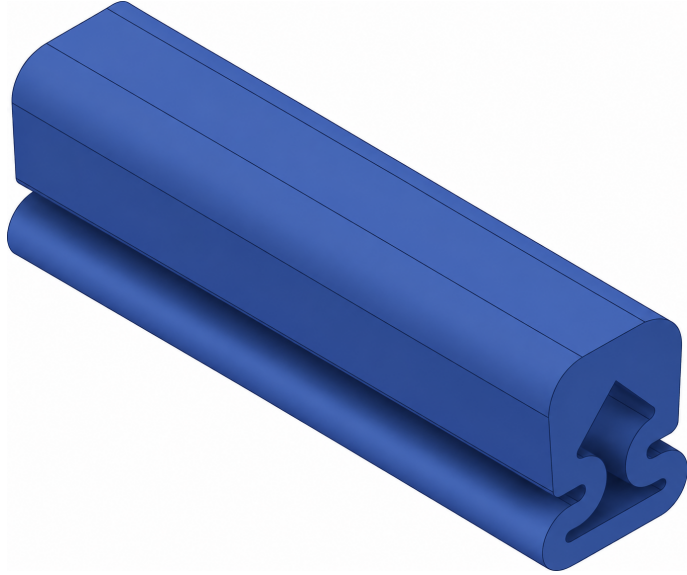


CUSTOM SECTION INFLATABLE SEAL PROFILE



Inflated height (mm)	23.5	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS <i>INFLATABLE SEALING SOLUTIONS</i>	Date 09.09.2026		Page A4 · 1/1				
Cross-sectional area (mm²)	0.216				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar				
Weight (kg/m)	0.281				0.0	1.5		0.40	Material Silicone rubber					
INFLATION PRESSURE (bar)					1.5	2.5		0.50						
					2.5	4.0		0.70						
Recommended	0.69				4.0	6.3		0.80	Hardness: 60 Shore A Colour: Natural					
Maximum	0.83				6.3	10.0		1.00						
MIN. BEND RADIUS (mm)					10.0	16.0		1.30	Projection					
					16.0	25.0		1.60						
Radially inward	120				25.0	40.0		2.00						
Radially outward	100	40.0	63.0	2.50										
		63.0	100.0	3.20										
Axial	70	100.0	-	3.2%										

Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com
---	--

Revision No: 0		Scale: -	
Custom Section Inflatable Seal Profile			
Profile No. 6683			