

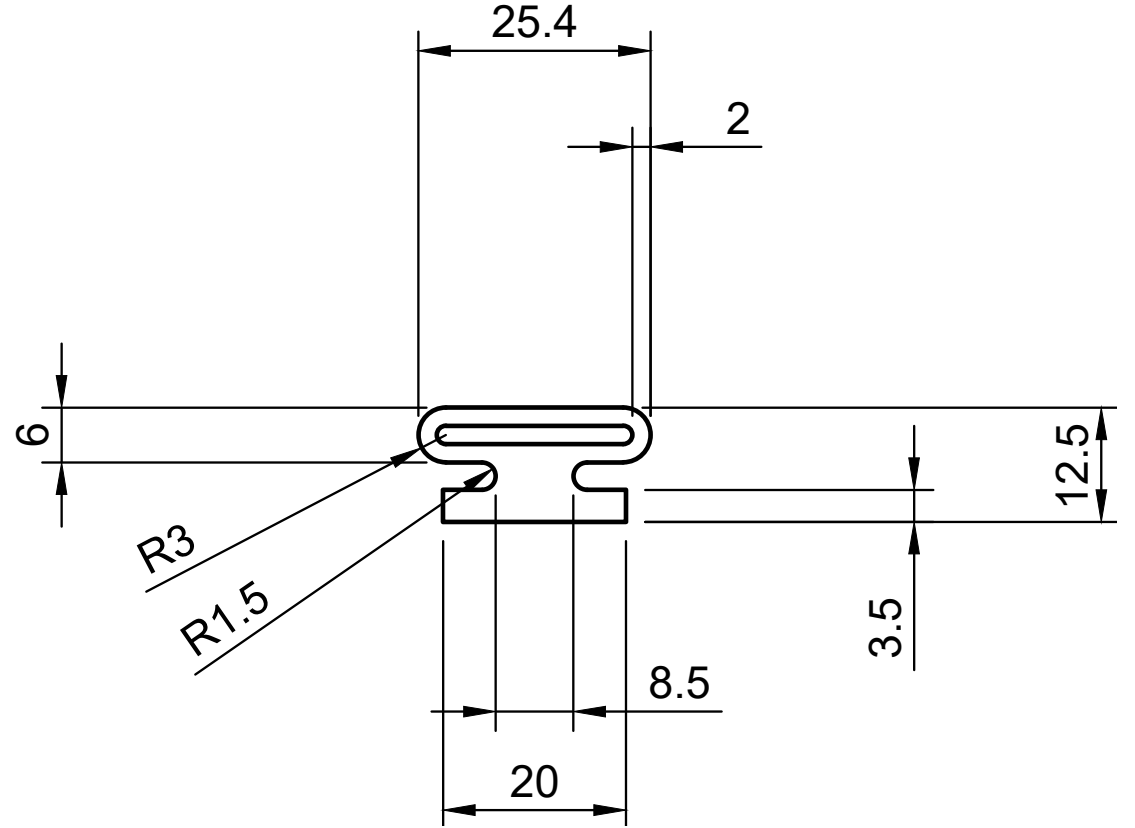


STEM FOOT INFLATABLE SEAL PROFILE

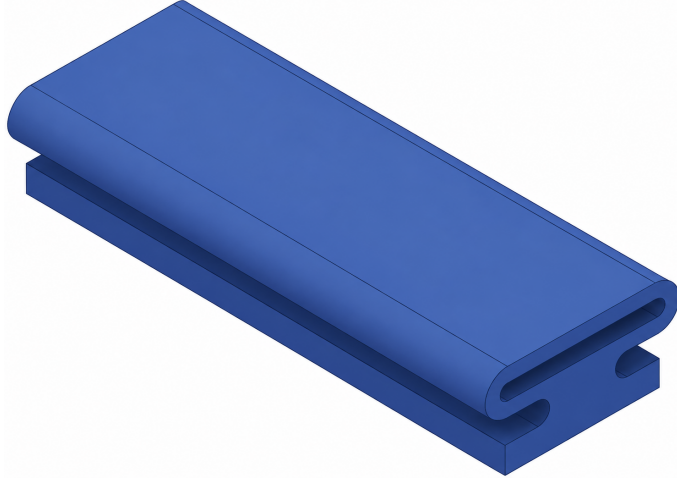

Inflated height (mm)	16	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026	Page A4 · 1/1
Cross-sectional area (mm²)	200				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar	Approved by Arif Çınar
Weight (kg/m)	0.260	0.0	1.5	0.40	Material Silicone rubber				
INFLATION PRESSURE (bar)		1.5	2.5	0.50					
		2.5	4.0	0.70	Hardness: 60 Shore A	Colour: Natural	Revision No: 0	Scale: -	
Recommended	1.03	4.0	6.3	0.80					
Maximum	1.38	6.3	10.0	1.00	Projection		Stem Foot Inflatable Seal Profile		
MIN. BEND RADIUS (mm)		10.0	16.0	1.30					
		16.0	25.0	1.60		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com		
Radially inward	150	25.0	40.0	2.00					
Radially outward	150	40.0	63.0	2.50					
		63.0	100.0	3.20					
Axial	Not specified	100.0	-	3.2%					



Beykent Industrial Estate

141 Sakarya Street
Buyukcekmece / Istanbul
Turkey
+90 538 840 29 87

info@inflatablegaskets.com
www.inflatablegaskets.com

Prepared by Çınar Silikon
Mam. San. ve Tic. Ltd. Şti.
Reproduction or sharing
with third parties requires
prior written permission.

info@cinarsilikon.com
www.cinarsilikon.com