
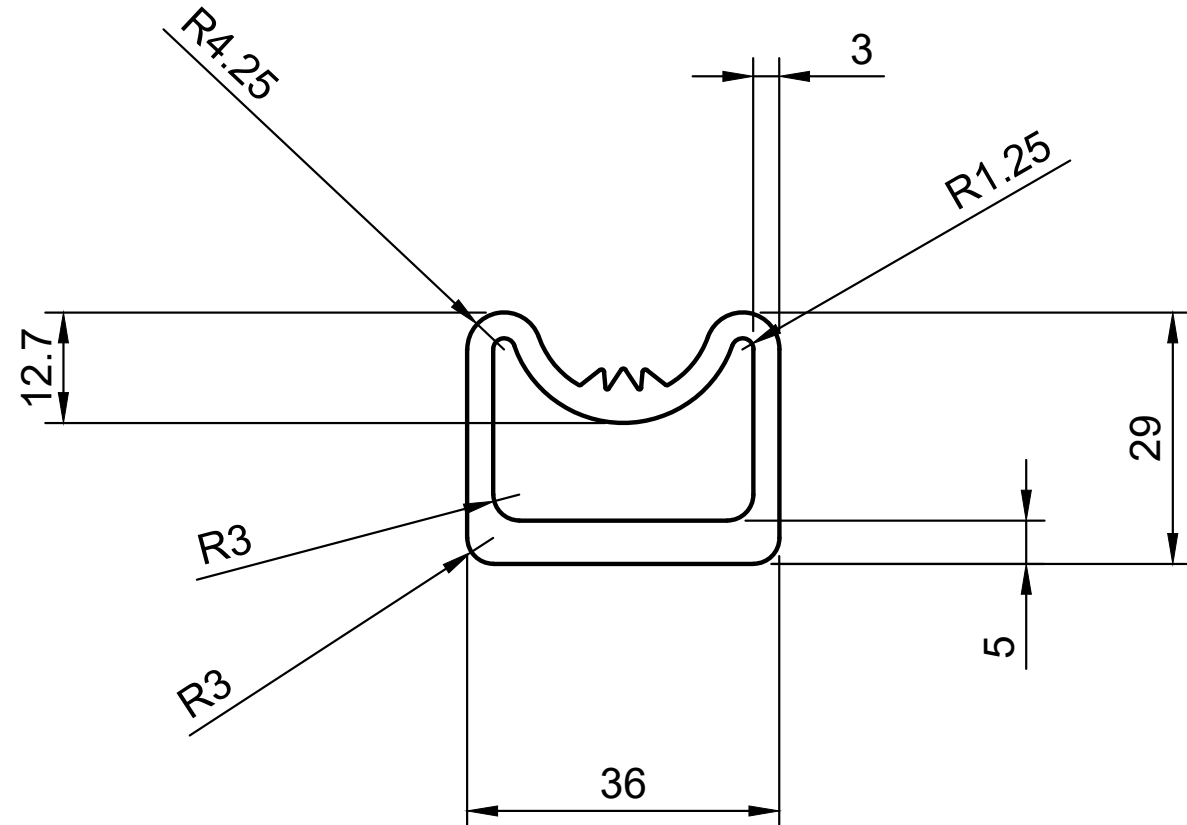


A 3D rendering of a blue U-shaped metal bracket. The bracket has a central slot and a small notch on the right side. It is shown from an isometric perspective.



Inflated height (mm)	52	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026	Page A4 · 1/1
Cross-sectional area (mm²)	450				ISO 3302-1: 2014 E3				
Weight (kg/m)	0.585				Material				
INFLATION PRESSURE (bar)					Silicone rubber				
Recommended	1.38				Hardness: 60 Shore A Colour: Natural				
Maximum	1.72				Projection				
MIN. BEND RADIUS (mm)									
Radially inward	100				Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission.				
Radially outward	100				info@cinarsilikon.com www.cinarsilikon.com				
Axial	250				Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com				
		Revision No: 0		Scale: -					
		Channel Fit Inflatable Seal Profile							
		Profile No. 7192							