

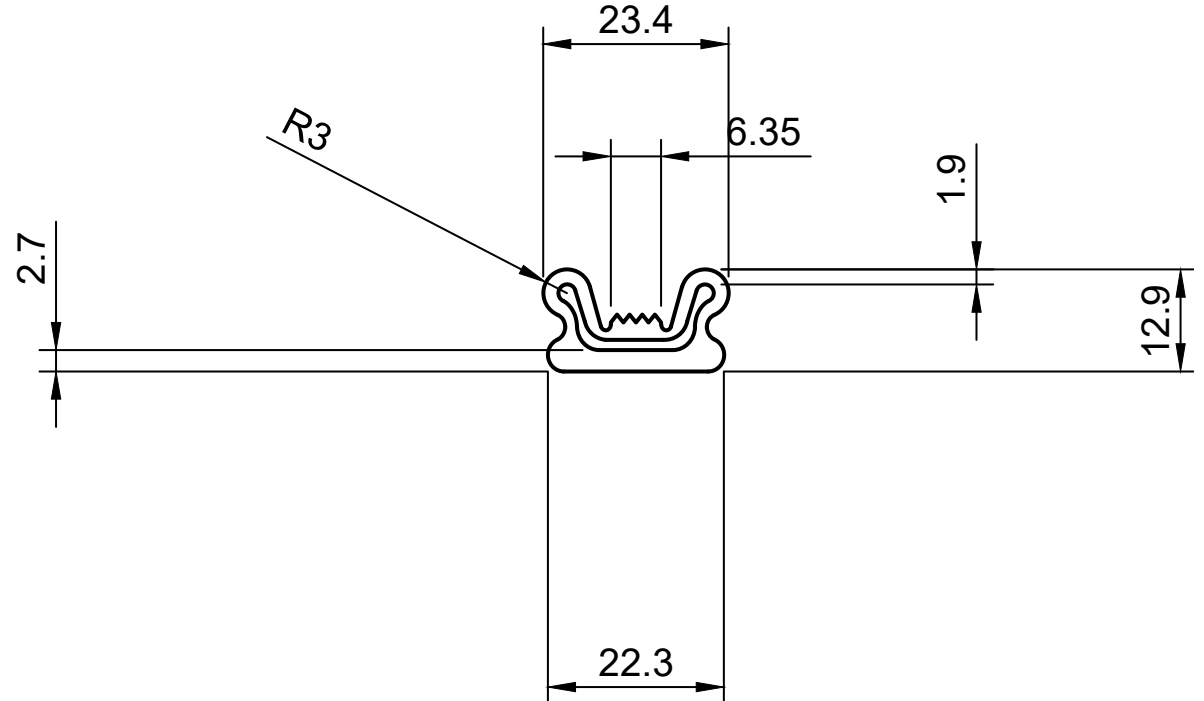


SNAP-IN BASE INFLATABLE SEAL PROFILE

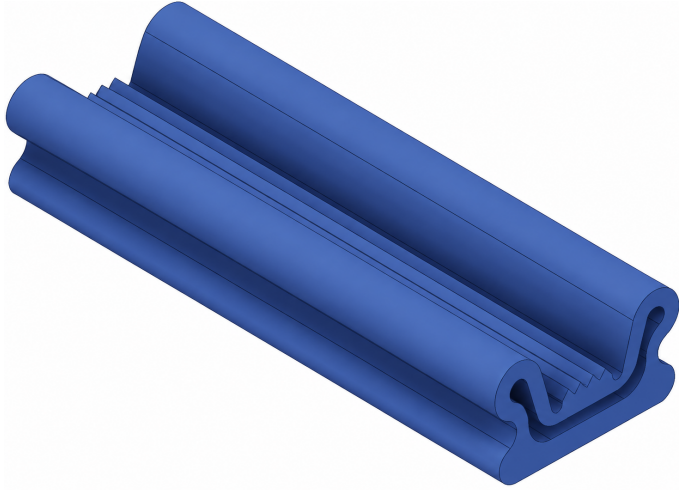

Inflated height (mm)	14	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1	
Cross-sectional area (mm²)	160				ISO 3302-1: 2014 E3				Drawn by Serhat Çınar		Approved by Arif Çınar
Weight (kg/m)	0.208	0.0	1.5	0.40	Material Silicone rubber						
INFLATION PRESSURE (bar)		1.5	2.5	0.50							
		2.5	4.0	0.70							
Recommended	0.83	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural				Revision No: 0	Scale: -	
Maximum	0.83	6.3	10.0	1.00							
MIN. BEND RADIUS (mm)		10.0	16.0	1.30	Projection					Snap-in Base Inflatable Seal Profile	
		16.0	25.0	1.60							
Radially inward	100	25.0	40.0	2.00					Profile No.	7488	
Radially outward	140	40.0	63.0	2.50							
		63.0	100.0	3.20							
Axial	170	100.0	-	3.2%							
					Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com			Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			



Beykent Industrial Estate

141 Sakarya Street
Buyukcekmece / Istanbul
Turkey
+90 538 840 29 87

info@inflatablegaskets.com
www.inflatablegaskets.com

Prepared by Çınar Silikon
Mam. San. ve Tic. Ltd. Şti.
Reproduction or sharing
with third parties requires
prior written permission.

info@cinarsilikon.com
www.cinarsilikon.com