
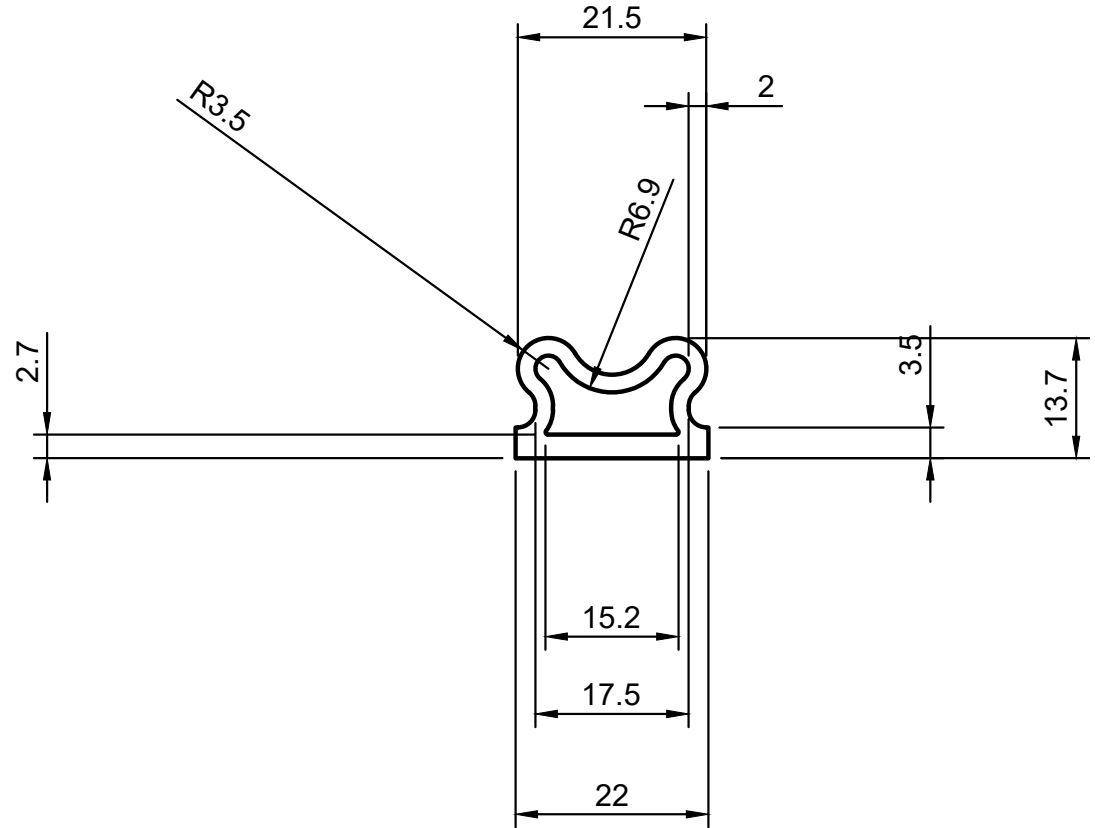
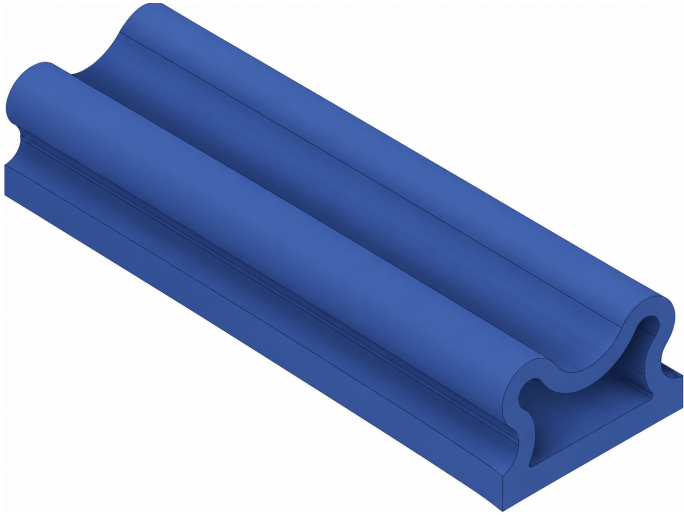


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	16	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1							
Cross-sectional area (mm²)	146				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar							
Weight (kg/m)	0.190				Material Silicone rubber			Hardness: 60 Shore A Colour: Natural		Revision No: 0 Scale: -							
INFLATION PRESSURE (bar)												Projection 					
														Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	
Profile No. 7556																	
					Recommended			0.97	4.0	6.3	0.80						
					Maximum			1.24	6.3	10.0	1.00	7556					
MIN. BEND RADIUS (mm)					16.0			25.0		1.60							
		Radially inward		150			25.0							40.0	2.00		
		Radially outward		150			40.0							63.0	2.50		
Axial	Not specified	100.0	-	3.2%													