
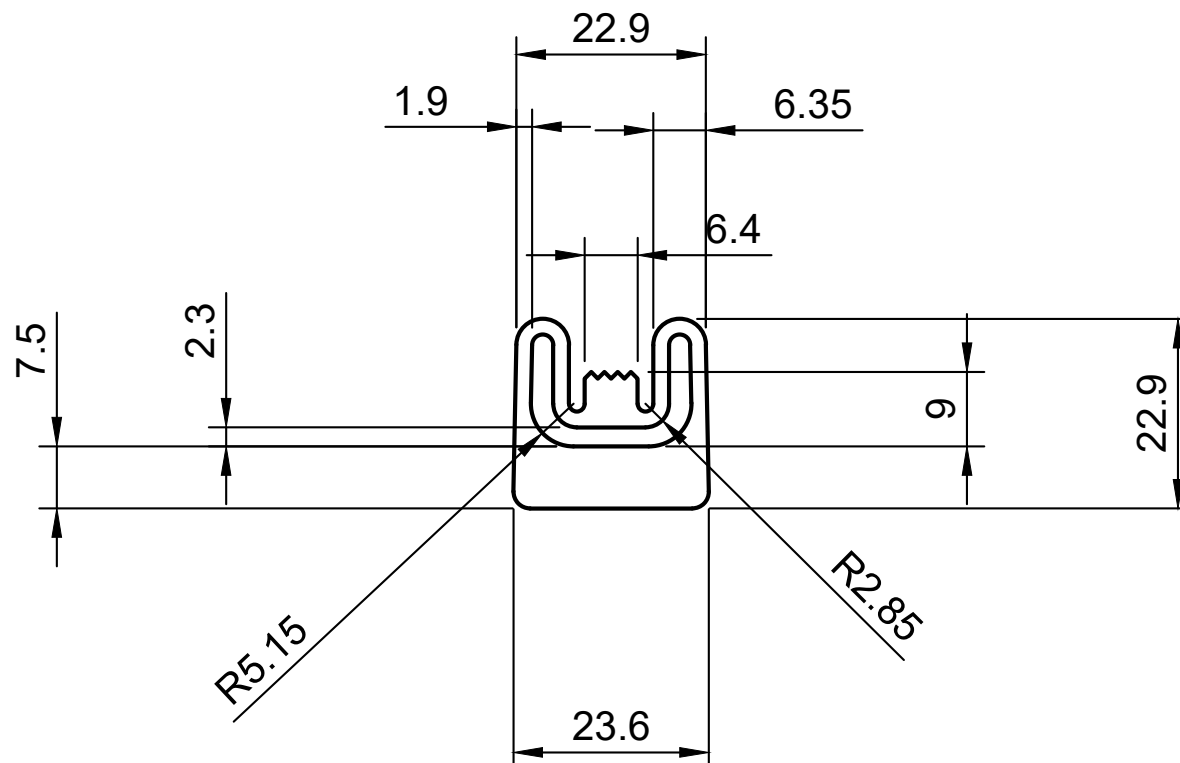


A 3D perspective rendering of a blue, U-shaped metal component. The component has a thick, rectangular base with a semi-circular top edge. A vertical wall rises from one side of the base, forming a U-shape. The inner surface of this wall features a series of horizontal ridges or grooves. At the bottom of the vertical wall, there are two circular mounting holes. The component is shown against a plain white background.



Inflated height (mm)	36	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS		Date 09.09.2026		Page A4 · 1/1				
Cross-sectional area (mm²)	342				ISO 3302-1: 2014 E3										
Weight (kg/m)	0.445				Material										
INFLATION PRESSURE (bar)					0.0	1.5	0.40	Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com		Drawn by Serhat Çınar		Approved by Arif Çınar	
Recommended	1.03				1.5	2.5	0.50								
Maximum	1.38				2.5	4.0	0.70								
MIN. BEND RADIUS (mm)					4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural		Revision No: 0		Scale: -			
Radially inward	150				6.3	10.0	1.00								
Radially outward	70				10.0	16.0	1.30								
Axial	140				16.0	25.0	1.60	Projection 		Flexible Sidewall Inflatable Seal Profile		Profile No. 8105			
		25.0	40.0	2.00											
		40.0	63.0	2.50											
		63.0	100.0	3.20											
		100.0	-	3.2%											