
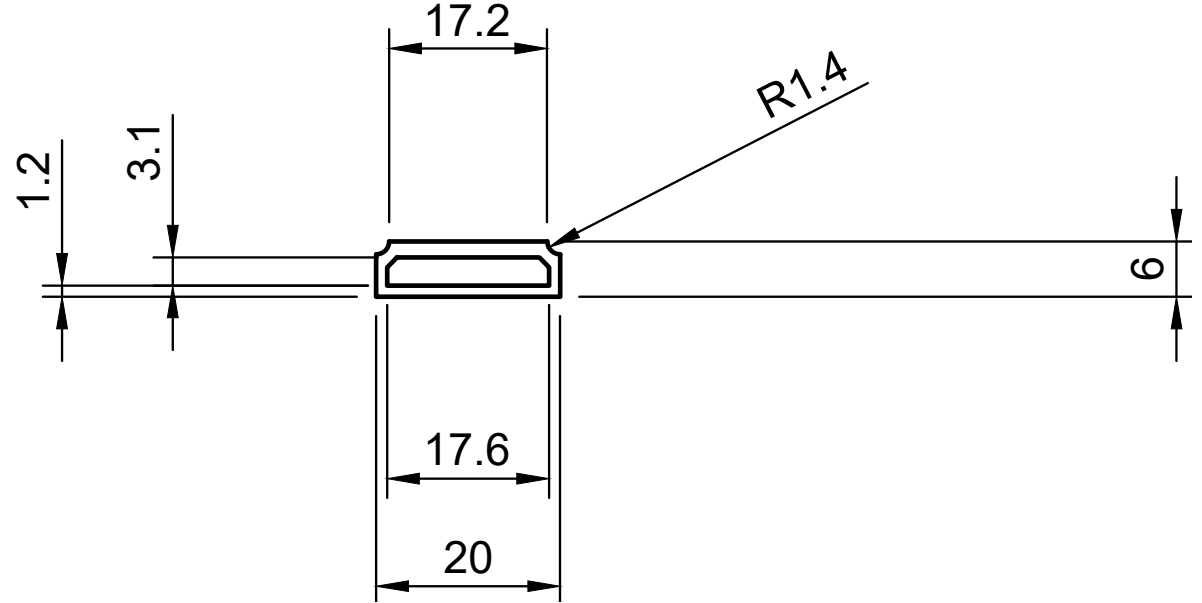
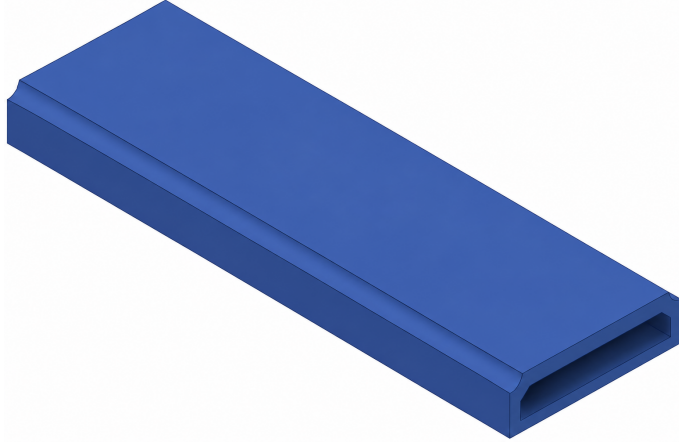


CASTELLATED INFLATABLE SEAL PROFILE



Inflated height (mm)	14	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1			
Cross-sectional area (mm²)	64				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar			
Weight (kg/m)	0.083	0.0	1.5	0.40	Material Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com		Revision No: 0		Scale: -	
INFLATION PRESSURE (bar)		1.5	2.5	0.50						Castellated Inflatable Seal Profile			
Recommended	1.03	2.5	4.0	0.70									
Maximum	1.38	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural				8260				
MIN. BEND RADIUS (mm)		6.3	10.0	1.00	Projection								
Radially inward	40	10.0	16.0	1.30									
Radially outward	80	16.0	25.0	1.60	Hardness: 60 Shore A Colour: Natural						Castellated Inflatable Seal Profile		
Axial	200	25.0	40.0	2.00				Projection					
		40.0	63.0	2.50	Hardness: 60 Shore A Colour: Natural		Castellated Inflatable Seal Profile						
		63.0	100.0	3.20					Projection				
		100.0	-	3.2%	Hardness: 60 Shore A Colour: Natural		Castellated Inflatable Seal Profile						