
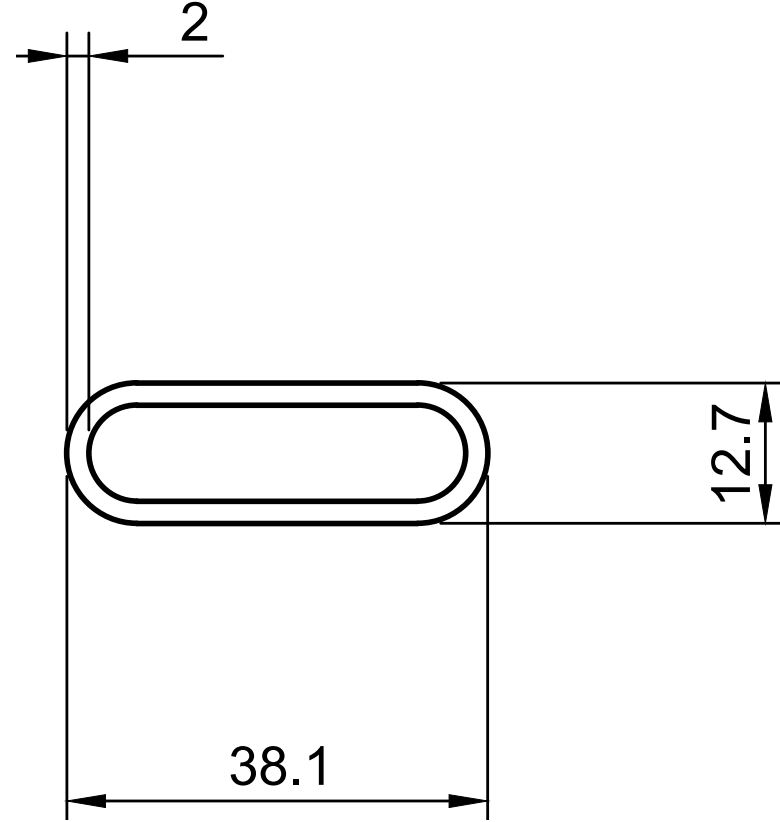
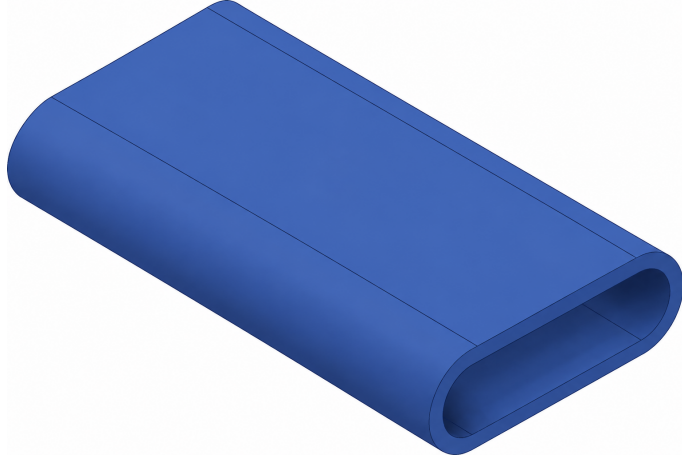


CUSTOM SECTION INFLATABLE SEAL PROFILE



Inflated height (mm)		30.5	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1	
Cross-sectional area (mm²)		169				ISO 3302-1: 2014 E3						
Weight (kg/m)		0.200	0.0	1.5	0.40	Material		Silicone rubber	Drawn by Serhat Çınar		Approved by Arif Çınar	
INFLATION PRESSURE (bar)			1.5	2.5	0.50							
Recommended		0.69	2.5	4.0	0.70			Hardness: 60 Shore A Colour: Natural				
Maximum		0.83	4.0	6.3	0.80							
MIN. BEND RADIUS (mm)			6.3	10.0	1.00	Projection			Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	
Radially inward		140	10.0	16.0	1.30							
Radially outward		140	16.0	25.0	1.60							
Axial		410	25.0	40.0	2.00							
			40.0	63.0	2.50							
			63.0	100.0	3.20							
			100.0	-	3.2%							
										Revision No: 0 Scale: -		
										Custom Section Inflatable Seal Profile		
										Profile No. 8396		