
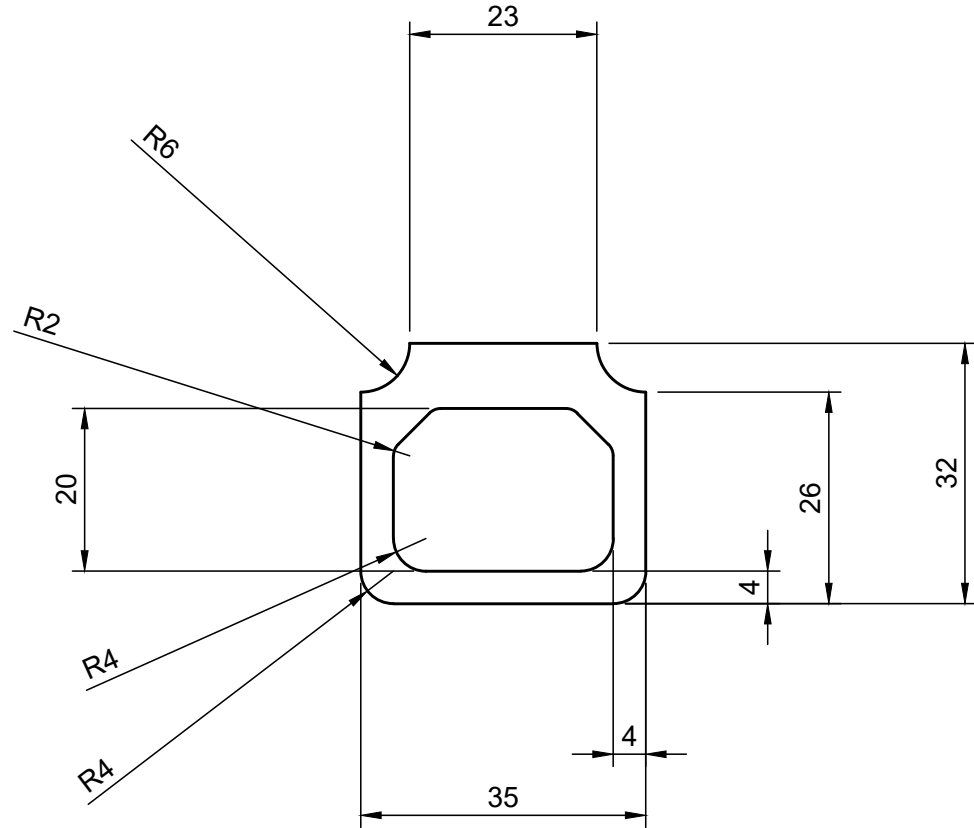
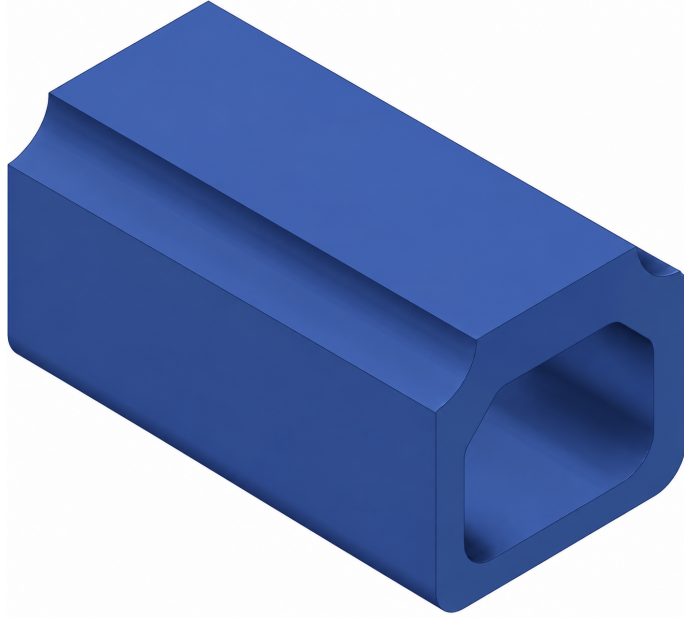


CASTELLATED INFLATABLE SEAL PROFILE



Inflated height (mm)	35	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026	Page A4 · 1/1	
Cross-sectional area (mm²)	549				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar	Approved by Arif Çınar	
Weight (kg/m)	0.714	0.0	1.5	0.40	Material		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	Revision No: 0	Scale: -
INFLATION PRESSURE (bar)		1.5	2.5	0.50	Silicone rubber					
Recommended	1.24	2.5	4.0	0.70	Hardness: 60 Shore A	Colour: Natural				
Maximum	1.38	4.0	6.3	0.80						
MIN. BEND RADIUS (mm)		6.3	10.0	1.00	Projection					
Radially inward	120	10.0	16.0	1.30						
Radially outward	100	16.0	25.0	1.60						
Axial	120	25.0	40.0	2.00						
		40.0	63.0	2.50						
		63.0	100.0	3.20						
		100.0	-	3.2%						
								Castellated Inflatable Seal Profile		
								Profile No.	8483	