
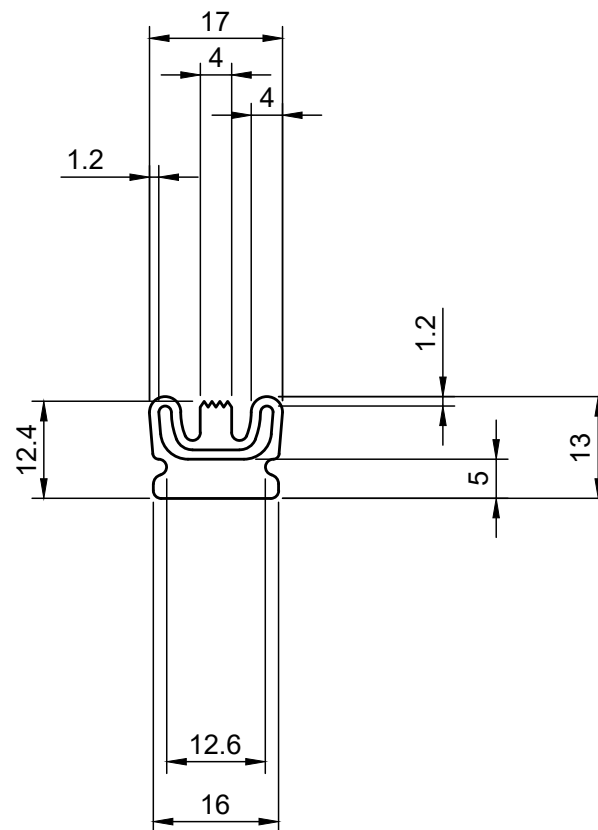
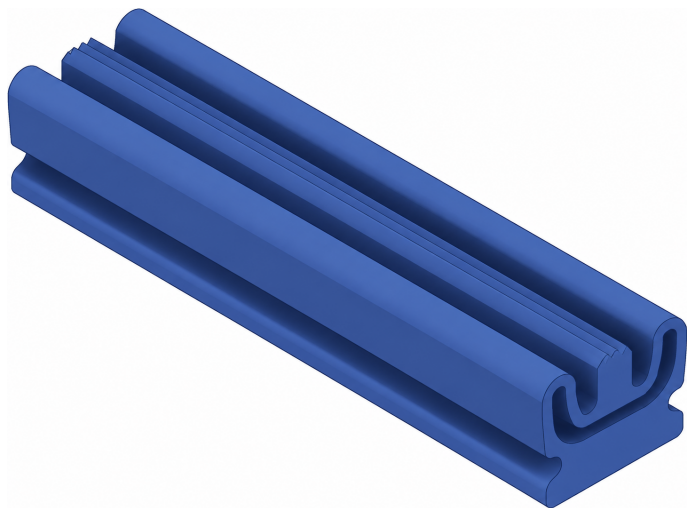


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	23.5	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance			Date 09.09.2026	Page A4 · 1/1		
Cross-sectional area (mm²)	141				ISO 3302-1: 2014 E3			Material Silicone rubber	Drawn by Serhat Çınar	Approved by Arif Çınar	
Weight (kg/m)	0.184				0.0	1.5					0.40
INFLATION PRESSURE (bar)					1.5	2.5					0.50
Recommended	0.97				2.5	4.0		0.70	Hardness: 60 Shore A	Colour: Natural	
Maximum	1.24				4.0	6.3		0.80			
MIN. BEND RADIUS (mm)					6.3	10.0		1.00			
Radially inward	40				10.0	16.0		1.30			
Radially outward	50				16.0	25.0		1.60	Projection 		
Axial	80				25.0	40.0		2.00			
		40.0	63.0	2.50							
		63.0	100.0	3.20	Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com				
		100.0	-	3.2%							

Revision No: 0		Scale: -
Flexible Sidewall Inflatable Seal Profile		
Profile No. 8575		