

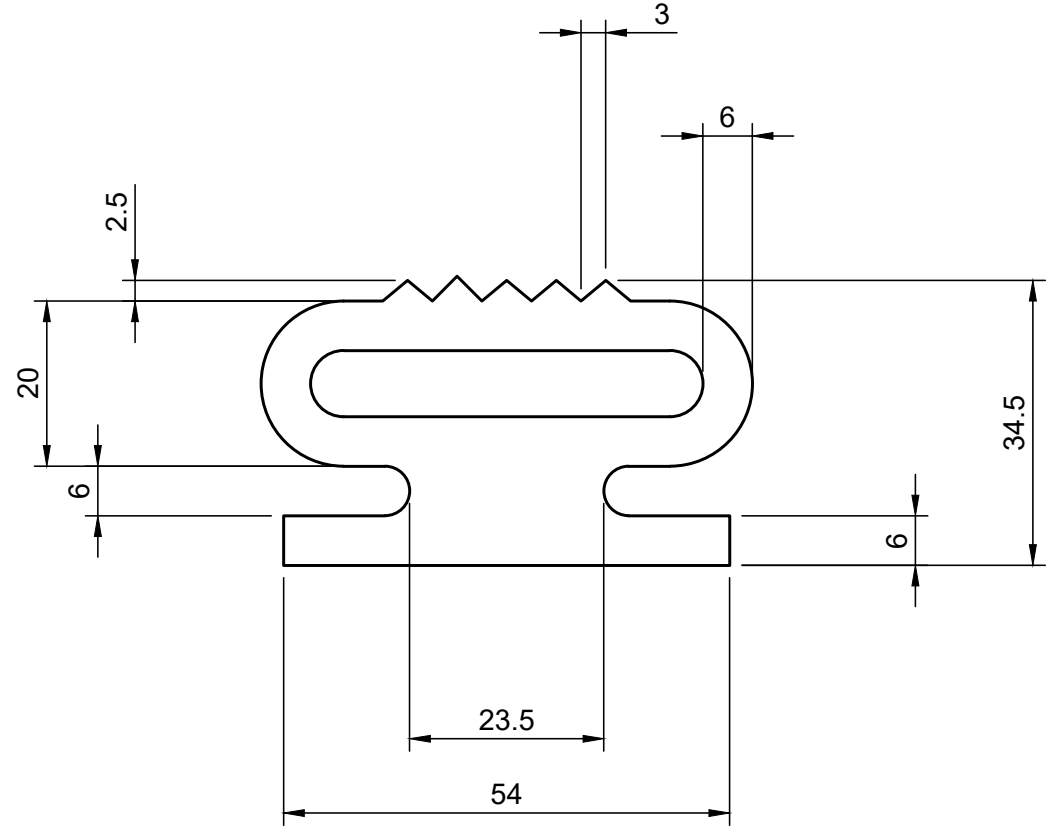


STEM FOOT INFLATABLE SEAL PROFILE

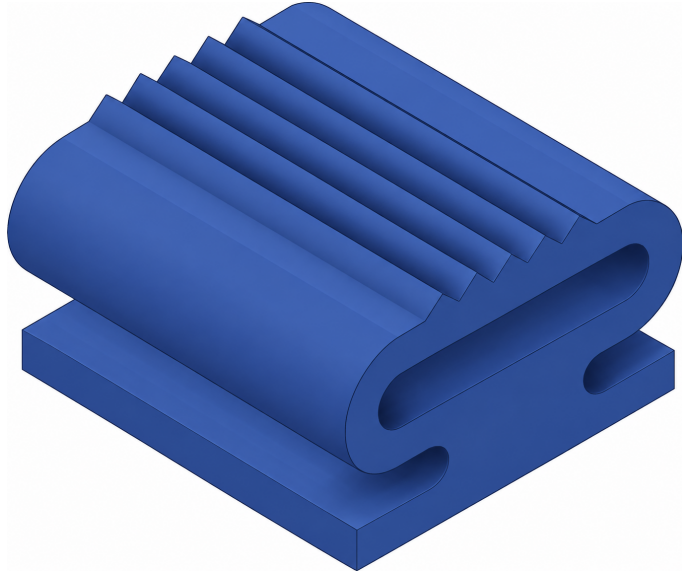

Inflated height (mm)	50	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026	Page A4 · 1/1
Cross-sectional area (mm²)	1250				ISO 3302-1: 2014 E3			Material Silicone rubber	Drawn by Serhat Çınar
Weight (kg/m)	1.625	0.0	1.5	0.40	Hardness: 60 Shore A	Colour: Natural	Revision No: 0		
INFLATION PRESSURE (bar)		1.5	2.5	0.50				Projection	
		2.5	4.0	0.70	Stem Foot Inflatable Seal Profile				
Recommended	1.24	4.0	6.3	0.80		MIN. BEND RADIUS (mm)		Profile No. 8733	
Maximum	1.38	6.3	10.0	1.00	Radially inward				130
		10.0	16.0	1.30		Radially outward	150		
		16.0	25.0	1.60	Axial			360	
		25.0	40.0	2.00					
		40.0	63.0	2.50					
		63.0	100.0	3.20					
		100.0	-	3.2%					



Beykent Industrial Estate

141 Sakarya Street
Buyukcekmece / Istanbul
Turkey
+90 538 840 29 87

info@inflatablegaskets.com
www.inflatablegaskets.com

Prepared by Çınar Silikon
Mam. San. ve Tic. Ltd. Şti.
Reproduction or sharing
with third parties requires
prior written permission.

info@cinarsilikon.com
www.cinarsilikon.com