

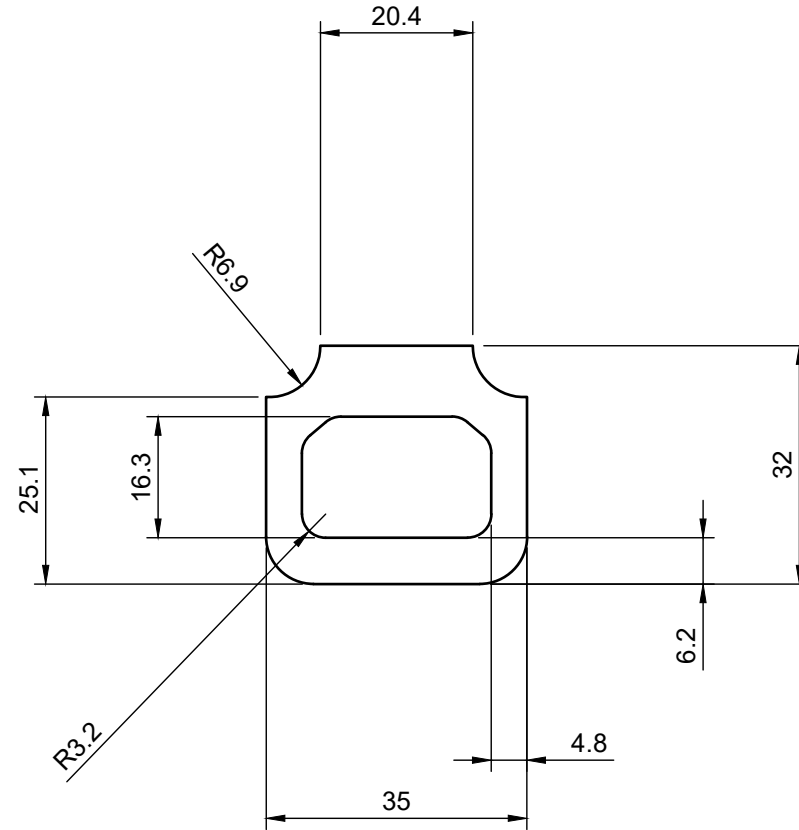


CHANNEL FIT INFLATABLE SEAL PROFILE

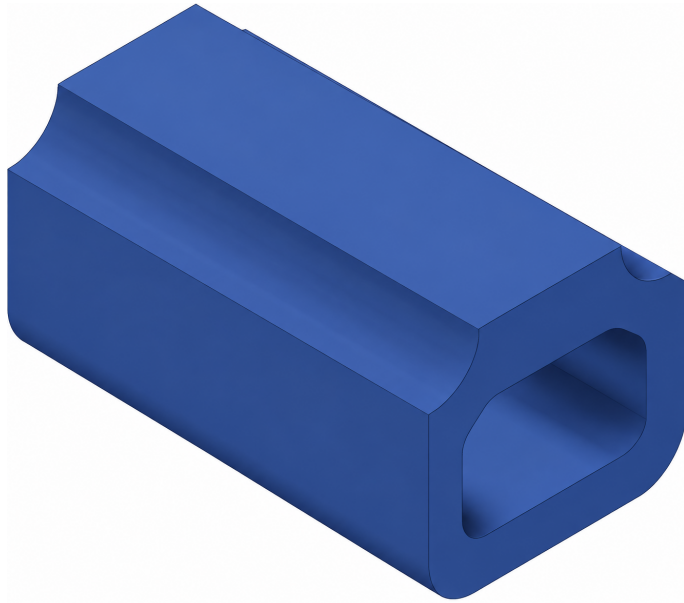

Inflated height (mm)	35	Over Nominal size Up to and including Tolerance E3 +/-	Manufacturing tolerance		INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1	
Cross-sectional area (mm²)	629		ISO 3302-1: 2014 E3			Drawn by Serhat Çınar	Approved by Arif Çınar		
Weight (kg/m)	0.818		Material Silicone rubber						
INFLATION PRESSURE (bar)								0.0	1.5
						1.5	2.5	0.50	
Recommended	1.24		2.5	4.0		0.70			
Maximum	1.38		4.0	6.3		0.80			
MIN. BEND RADIUS (mm)			6.3	10.0		1.00			
			10.0	16.0		1.30			
Radially inward	120	16.0	25.0	1.60	Hardness: 60 Shore A		Colour: Natural		
Radially outward	100	25.0	40.0	2.00	Projection 				
Axial	120	40.0	63.0	2.50					
		63.0	100.0	3.20					
		100.0	-	3.2%	Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com		
					Revision No: 0		Scale: -		
					Channel Fit Inflatable Seal Profile				
					Profile No. 8829				



Beykent Industrial Estate

141 Sakarya Street
Buyukcekmece / Istanbul
Turkey
+90 538 840 29 87

info@inflatablegaskets.com
www.inflatablegaskets.com

Prepared by Çınar Silikon
Mam. San. ve Tic. Ltd. Şti.
Reproduction or sharing
with third parties requires
prior written permission.

info@cinarsilikon.com
www.cinarsilikon.com