
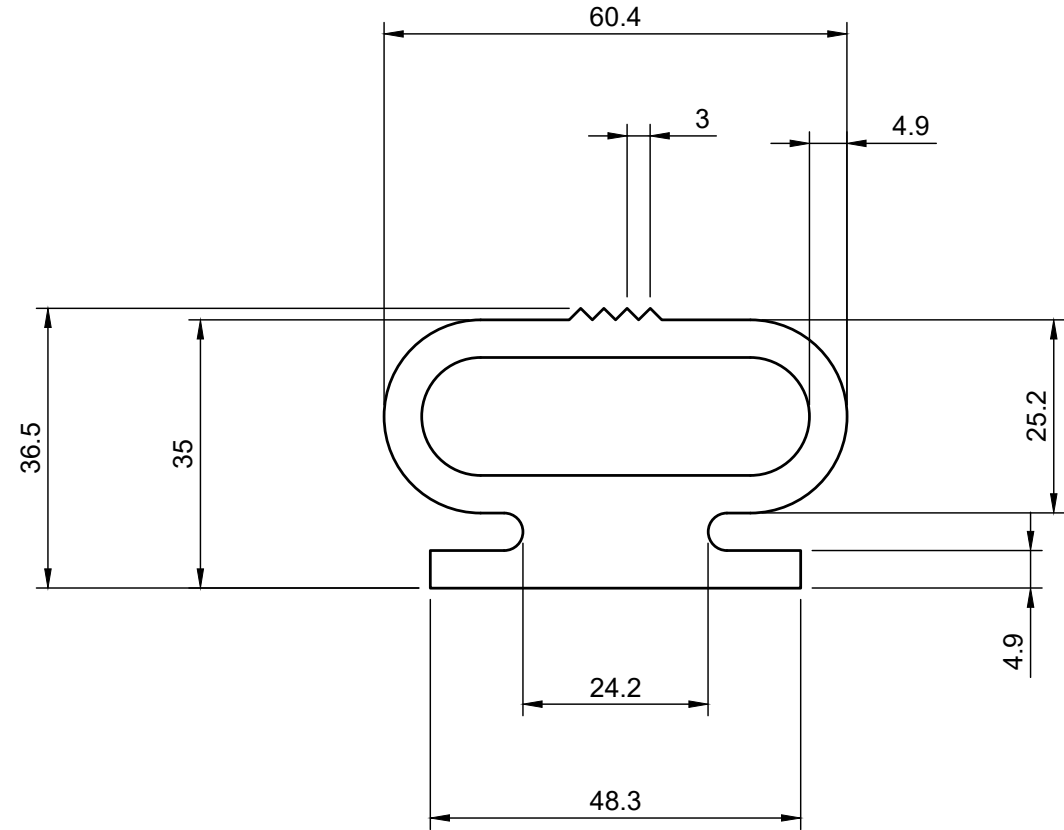
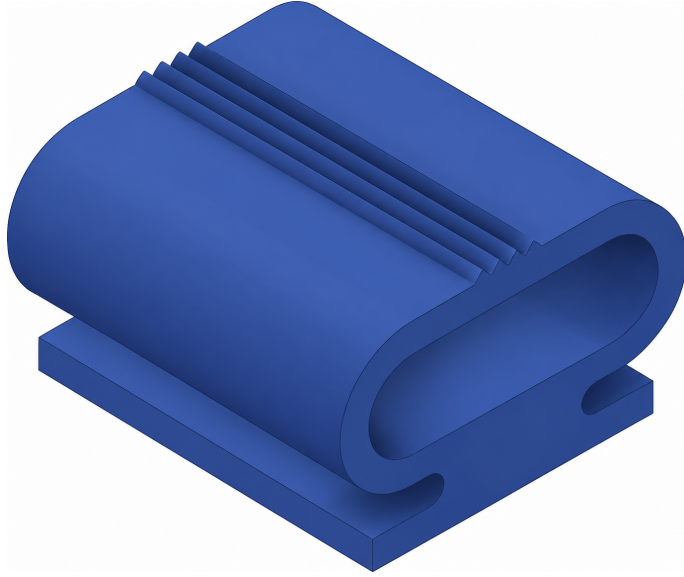


STEM FOOT INFLATABLE SEAL PROFILE



Inflated height (mm)	57	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1				
Cross-sectional area (mm²)	1027				ISO 3302-1: 2014 E3				Drawn by Serhat Çınar		Approved by Arif Çınar			
Weight (kg/m)	1.335				0.0	1.5		0.40	Material Silicone rubber					
INFLATION PRESSURE (bar)					1.5	2.5		0.50						
					2.5	4.0		0.70						
Recommended	1.03				4.0	6.3		0.80	Hardness: 60 Shore A Colour: Natural					
Maximum	1.38				6.3	10.0		1.00						
MIN. BEND RADIUS (mm)		10.0	16.0	1.30	Projection 									
		16.0	25.0	1.60										
Radially inward	130	25.0	40.0	2.00										
Radially outward	150	40.0	63.0	2.50										
		63.0	100.0	3.20										
Axial	360	100.0	-	3.2%										

Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com
---	--	--

Revision No: 0		Scale: -	
Stem Foot Inflatable Seal Profile			
Profile No.		8953	