
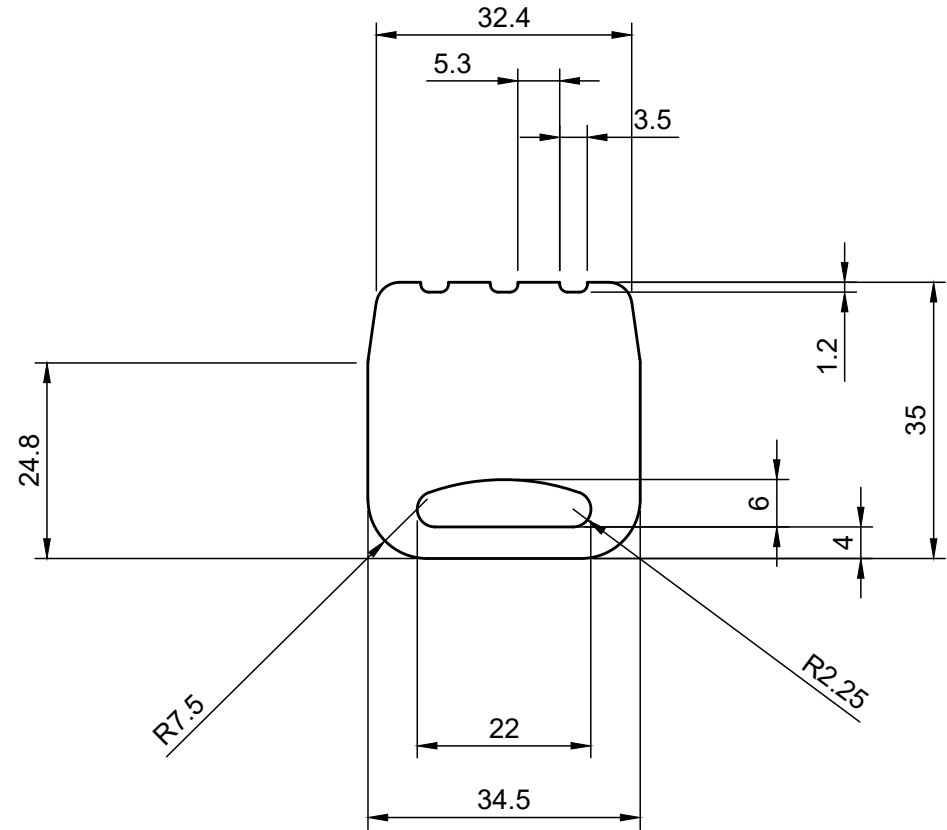
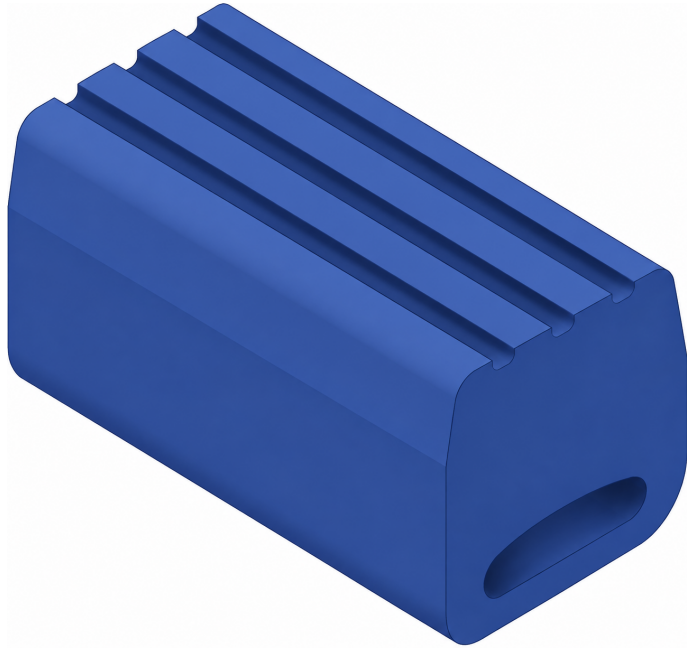


CUSTOM SECTION INFLATABLE SEAL PROFILE



Inflated height (mm)	37	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1	
Cross-sectional area (mm²)	1041				ISO 3302-1: 2014 E3				Drawn by Serhat Çınar		Approved by Arif Çınar
Weight (kg/m)	1.353	0.0	1.5	0.40	Material Silicone rubber			Revision No: 0	Scale: -		
INFLATION PRESSURE (bar)		1.5	2.5	0.50							
		2.5	4.0	0.70							
Recommended	0.69	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural			Custom Section Inflatable Seal Profile			
Maximum	1.03	6.3	10.0	1.00							
MIN. BEND RADIUS (mm)		10.0	16.0	1.30	Projection			Profile No. 8957			
		16.0	25.0	1.60							
Radially inward	130	25.0	40.0	2.00				Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com			
Radially outward	120	40.0	63.0	2.50							
Axial	150	63.0	100.0	3.20							
		100.0	-	3.2%							
					Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com						