
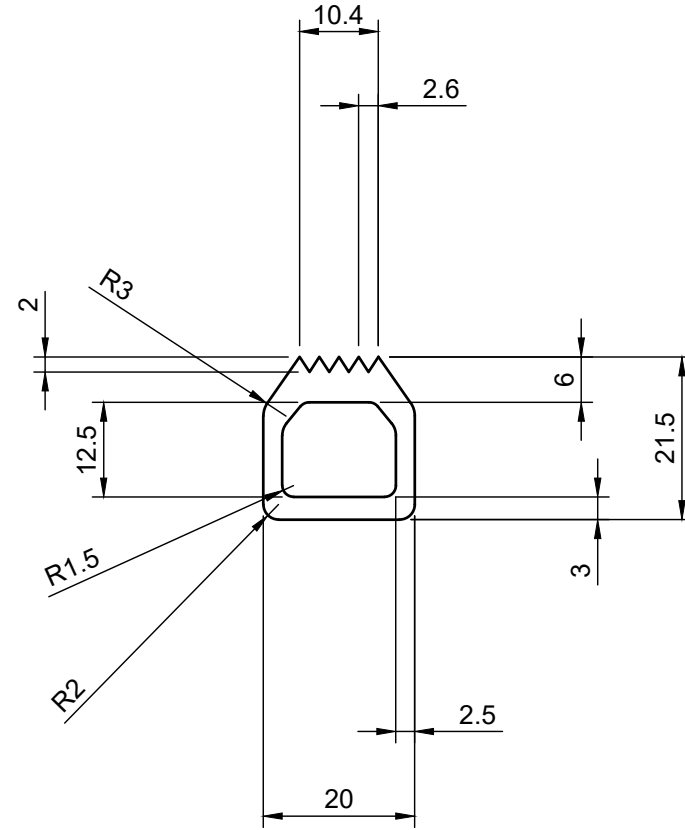
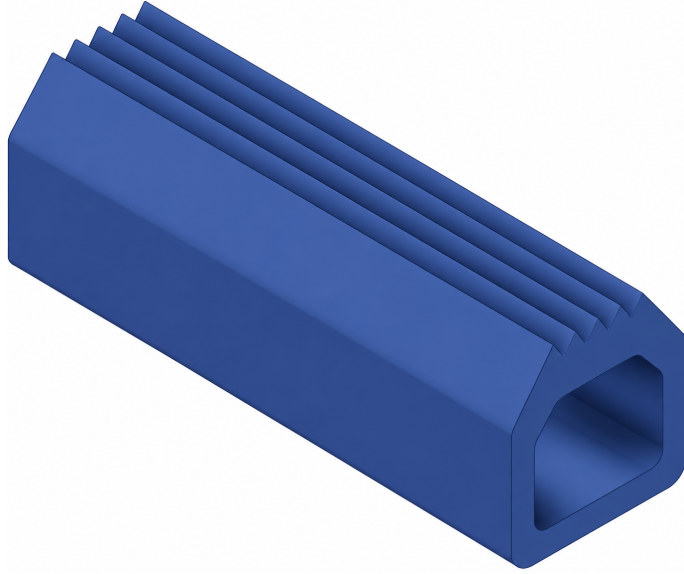


CASTELLATED INFLATABLE SEAL PROFILE



Inflated height (mm)	23	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		Date 09.09.2026	Page A4 · 1/1
Cross-sectional area (mm²)	208				ISO 3302-1: 2014 E3			
Weight (kg/m)	0.270	0.0	1.5	0.40	Material Silicone rubber		Drawn by Serhat Çınar	Approved by Arif Çınar
INFLATION PRESSURE (bar)		1.5	2.5	0.50				
		2.5	4.0	0.70				
Recommended	1.03	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural		Revision No: 0	Scale: -
Maximum	1.38	6.3	10.0	1.00				
MIN. BEND RADIUS (mm)		10.0	16.0	1.30	Projection 		Castellated Inflatable Seal Profile	
		16.0	25.0	1.60				
Radially inward	80	25.0	40.0	2.00			Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission.	
Radially outward	60	40.0	63.0	2.50				
Axial	80	63.0	100.0	3.20				
		100.0	-	3.2%			Profile No. 9081	