
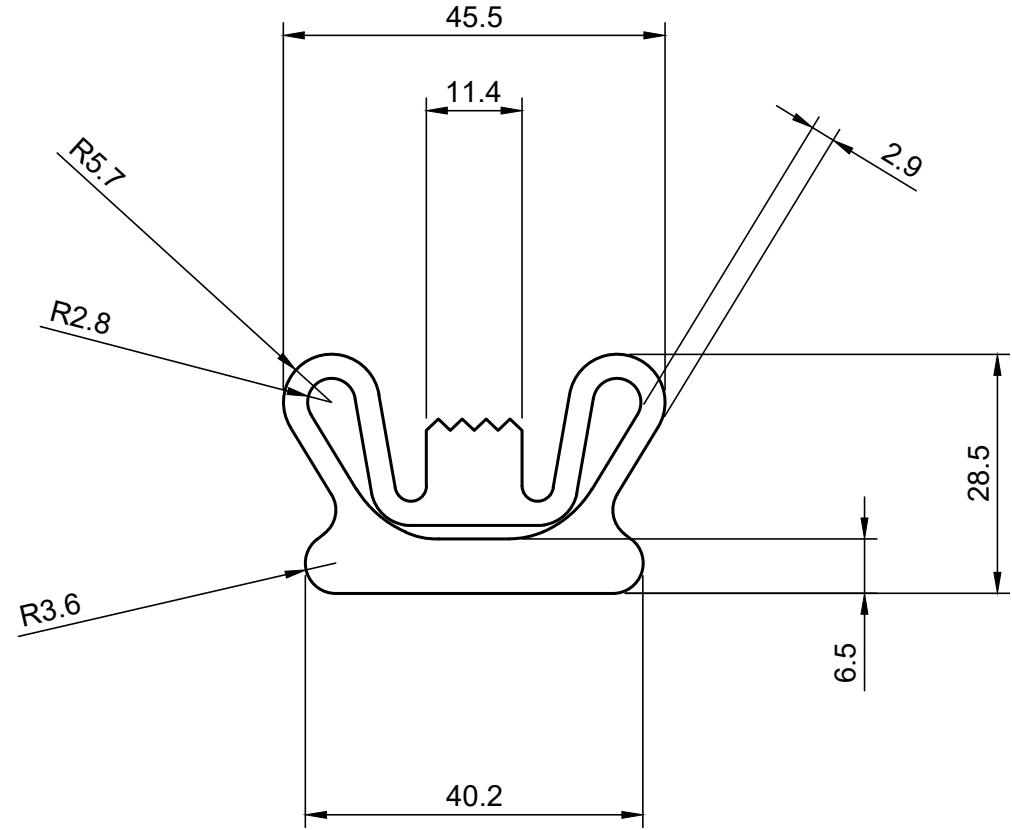
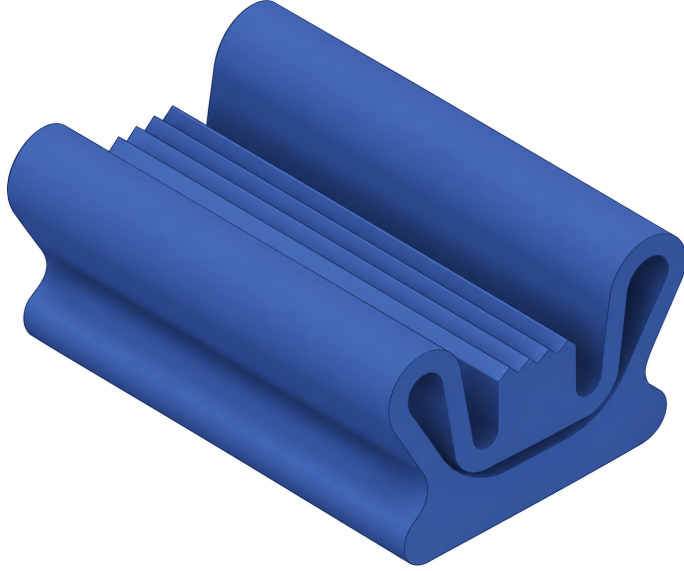


SNAP-IN BASE INFLATABLE SEAL PROFILE



Inflated height (mm)	58	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1			
Cross-sectional area (mm²)	706				ISO 3302-1: 2014 E3								
Weight (kg/m)	0.847	0.0	1.5	0.40	Material Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Büyükcemece / İstanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com		Drawn by Serhat Çınar		Approved by Arif Çınar	
INFLATION PRESSURE (bar)		1.5	2.5	0.50						Revision No: 0		Scale: -	
Recommended	0.83	2.5	4.0	0.70									
Maximum	1.24	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural					Snap-in Base Inflatable Seal Profile			
MIN. BEND RADIUS (mm)		6.3	10.0	1.00	Projection 			Profile No. 9664					
Radially inward	110	10.0	16.0	1.30									
Radially outward	80	16.0	25.0	1.60									
Axial	180	25.0	40.0	2.00									
		40.0	63.0	2.50									
		63.0	100.0	3.20									
		100.0	-	3.2%									