
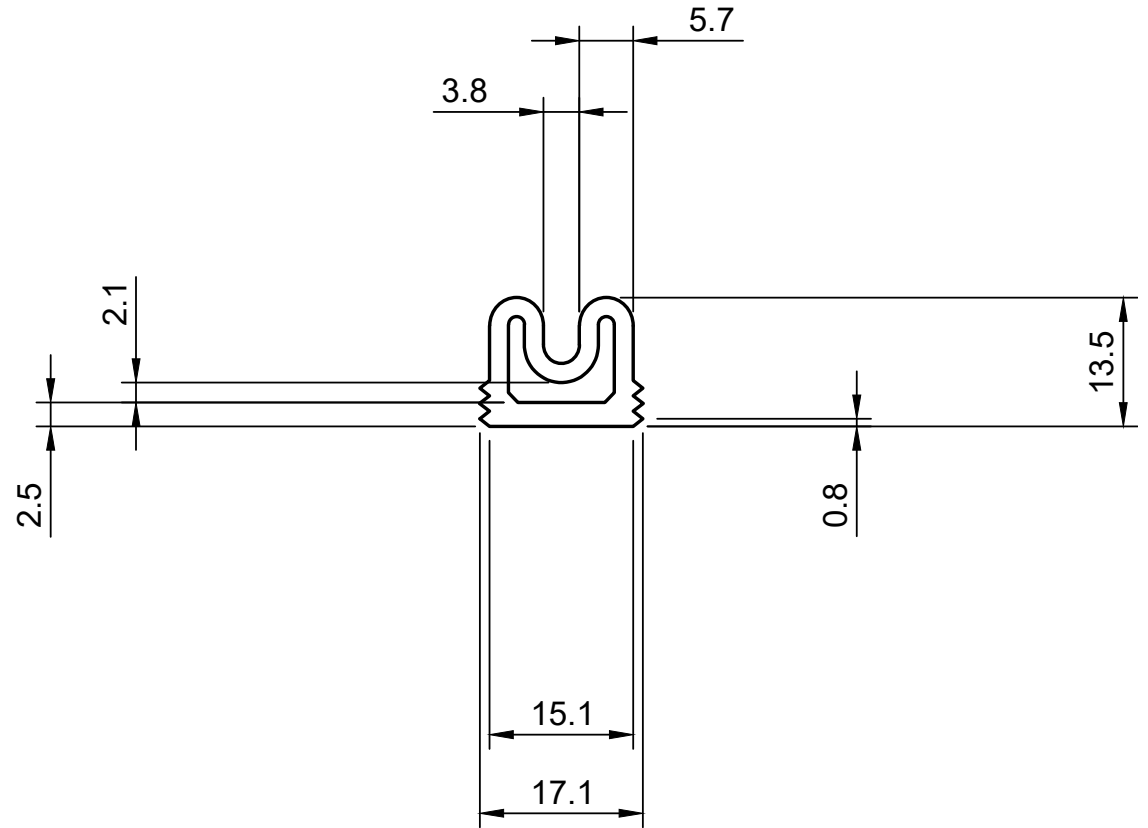
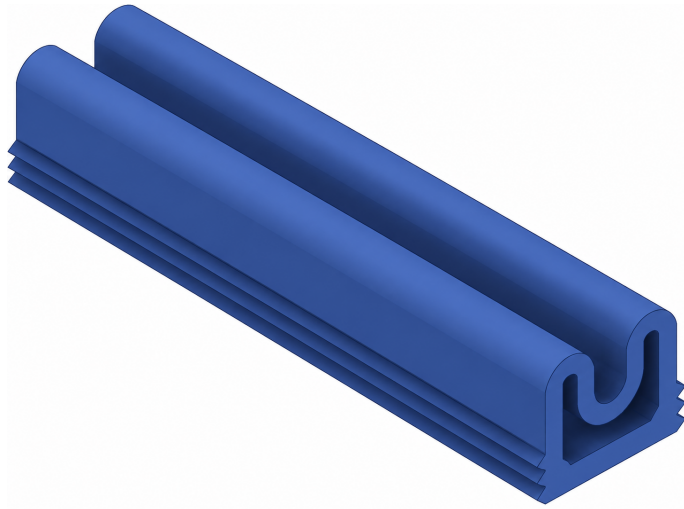


CHANNEL FIT INFLATABLE SEAL PROFILE



Inflated height (mm)	19	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1					
Cross-sectional area (mm²)	127				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar					
Weight (kg/m)	0.158				Material Silicone rubber			Hardness: 60 Shore A Colour: Natural		Revision No: 0 Scale: -					
INFLATION PRESSURE (bar)												Projection 			
														MIN. BEND RADIUS (mm)	
Recommended	1.03				0.0	1.5		0.40	Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com		Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com				
Maximum	1.24				1.5	2.5		0.50							
MIN. BEND RADIUS (mm)					2.5	4.0		0.70							
					4.0	6.3		0.80							
		6.3	10.0	1.00											
Radially inward	160	10.0	16.0	1.30	Channel Fit Inflatable Seal Profile										
Radially outward	130	16.0	25.0	1.60			Profile No. 9756								
Axial	130	25.0	40.0	2.00											
		40.0	63.0	2.50											
		63.0	100.0	3.20											
		100.0	-	3.2%											