
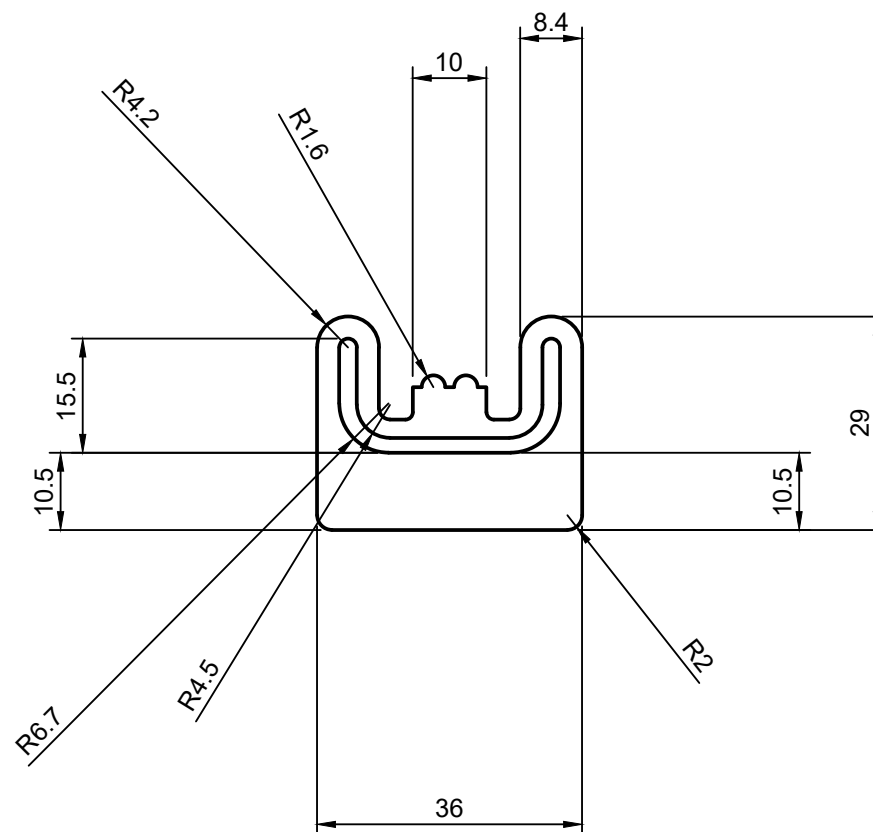
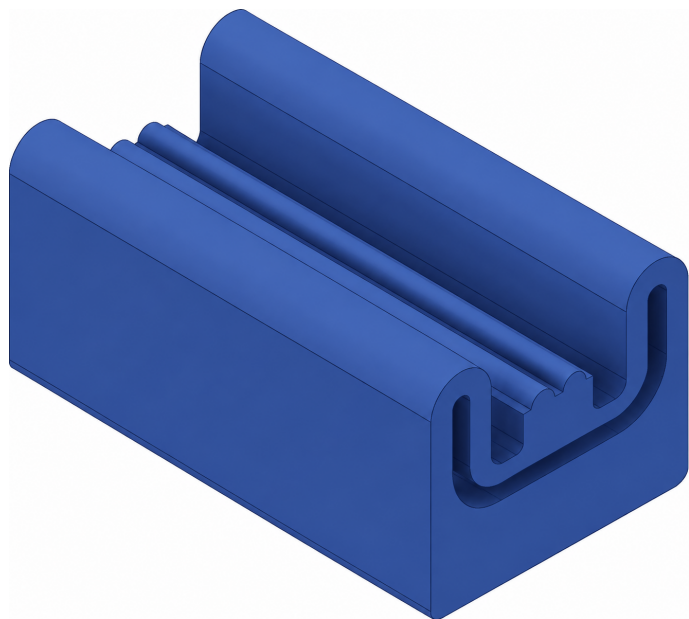
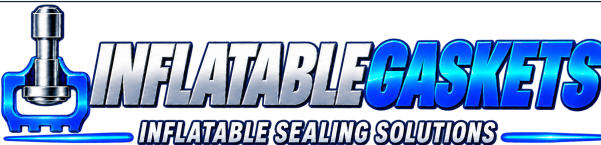


FLEXIBLE SIDEWALL INFLATABLE SEAL PROFILE



Inflated height (mm)	53	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance			Date 09.09.2026		Page A4 · 1/1												
Cross-sectional area (mm²)	699				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar												
Weight (kg/m)	0.909				0.0	1.5		0.40	Material Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com											
INFLATION PRESSURE (bar)					1.5	2.5		0.50														
Recommended	1.03				2.5	4.0		0.70														
Maximum	1.24				4.0	6.3		0.80	Hardness: 60 Shore A Colour: Natural						Projection 							
MIN. BEND RADIUS (mm)					6.3	10.0		1.00														
Radially inward	190				10.0	16.0		1.30	Projection										Profile No. 2296			
					16.0	25.0		1.60														
Radially outward	145				25.0	40.0		2.00														
		40.0	63.0	2.50																		
Axial	400	63.0	100.0	3.20	Projection																	
		100.0	-	3.2%																		