
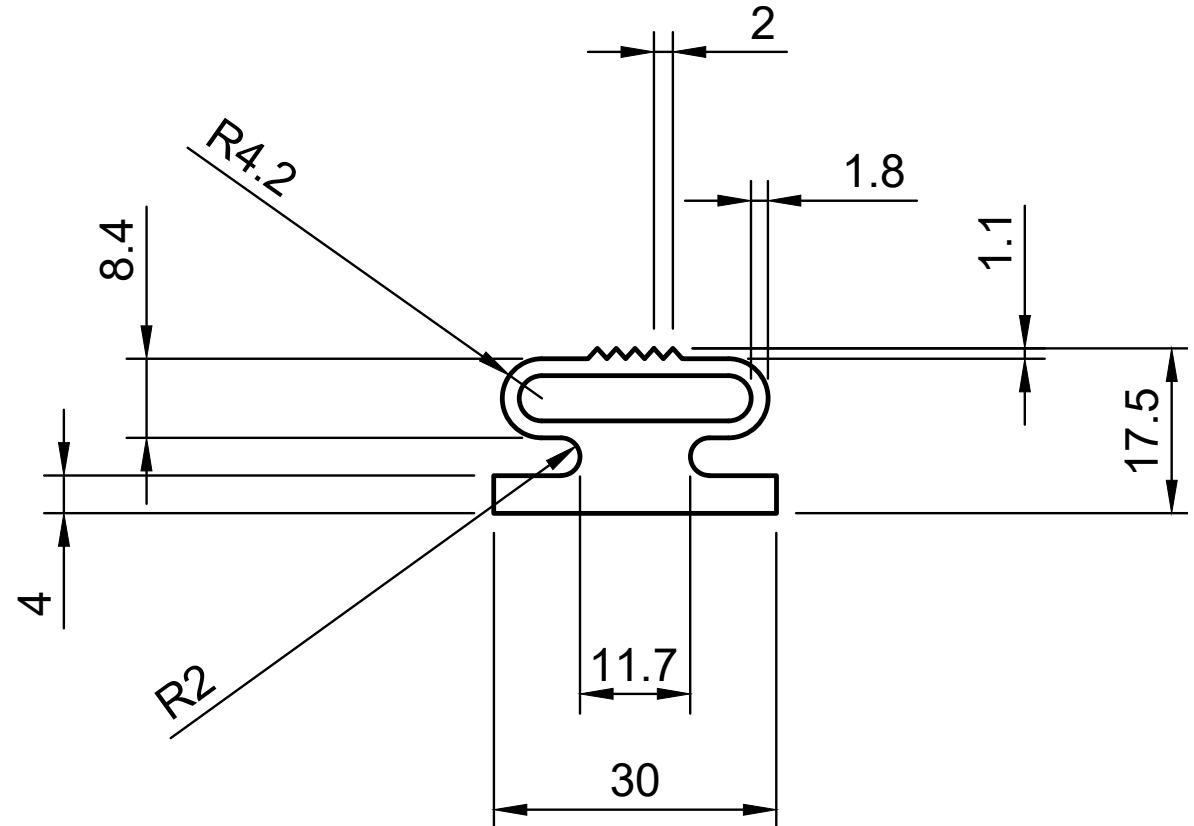


STEM FOOT INFLATABLE SEAL PROFILE

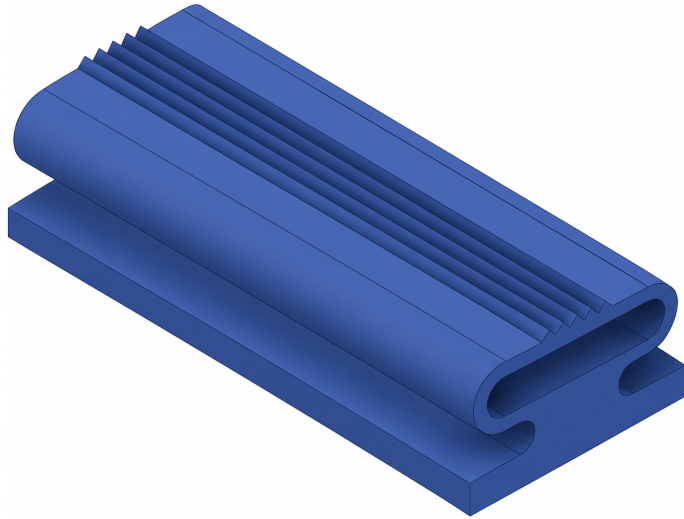

Inflated height (mm)	28	Over Nominal size Up to and including Tolerance E3 +/-	Manufacturing tolerance		INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com	Date 09.09.2026	Page A4 · 1/1		
Cross-sectional area (mm²)	284		ISO 3302-1: 2014 E3			Material Silicone rubber	Drawn by Serhat Çınar	Approved by Arif Çınar	
Weight (kg/m)	0.369		0.0	1.5					0.40
INFLATION PRESSURE (bar)			1.5	2.5					0.50
			2.5	4.0		0.70			
Recommended	1.03		4.0	6.3		0.80			
Maximum	1.38		6.3	10.0		1.00			
MIN. BEND RADIUS (mm)			10.0	16.0		1.30			
			16.0	25.0		1.60			
Radially inward	100	25.0	40.0	2.00					
Radially outward	120	40.0	63.0	2.50					
		63.0	100.0	3.20					
Axial	220	100.0	-	3.2%					
Hardness: 60 Shore A Colour: Natural Projection 