
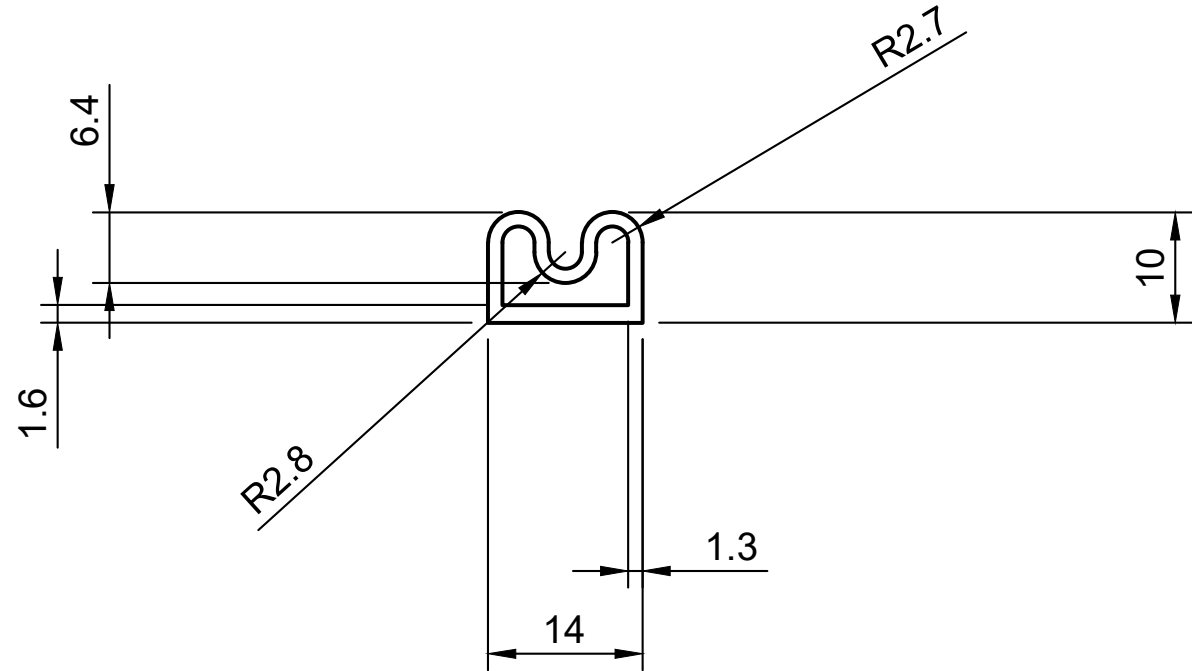
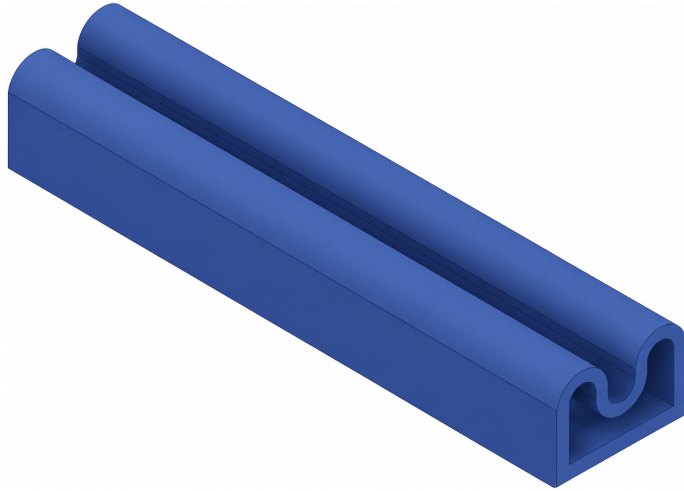
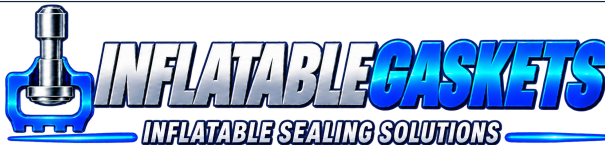


CHANNEL FIT INFLATABLE SEAL PROFILE



Inflated height (mm)	14.5	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance			Date 09.09.2026		Page A4 · 1/1			
Cross-sectional area (mm²)	65				ISO 3302-1: 2014 E3			Drawn by Serhat Çınar		Approved by Arif Çınar			
Weight (kg/m)	0.085	0.0	1.5	0.40	Material Silicone rubber		Beykent Industrial Estate 141 Sakarya Street Buyukcekmece / Istanbul Turkey +90 538 840 29 87 info@inflatablegaskets.com www.inflatablegaskets.com	Prepared by Çınar Silikon Mam. San. ve Tic. Ltd. Şti. Reproduction or sharing with third parties requires prior written permission. info@cinarsilikon.com www.cinarsilikon.com		Revision No: 0		Scale: -	
INFLATION PRESSURE (bar)		1.5	2.5	0.50						Channel Fit Inflatable Seal Profile			
Recommended	1.03	2.5	4.0	0.70									
Maximum	1.03	4.0	6.3	0.80	Hardness: 60 Shore A Colour: Natural				Profile No. 3015				
MIN. BEND RADIUS (mm)		6.3	10.0	1.00									
Radially inward	90	10.0	16.0	1.30									
Radially outward	90	16.0	25.0	1.60									
Axial	130	25.0	40.0	2.00									
		40.0	63.0	2.50	Projection								
		63.0	100.0	3.20									
		100.0	-	3.2%									