
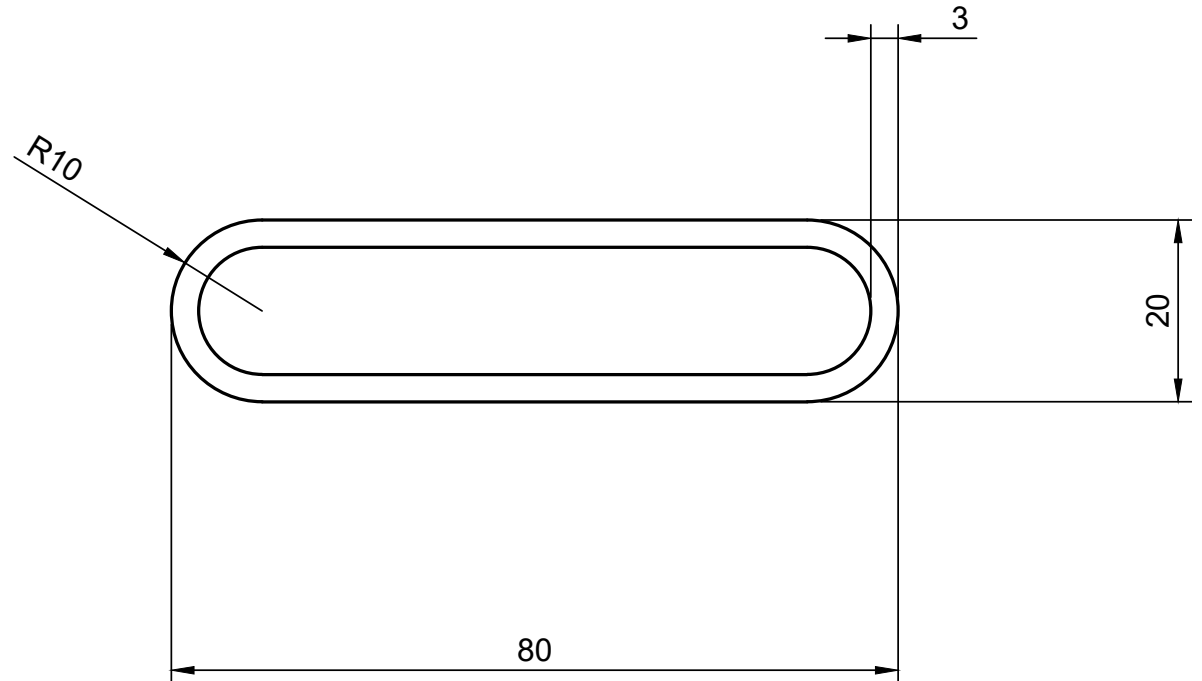


CUSTOM SECTION INFLATABLE SEAL PROFILE

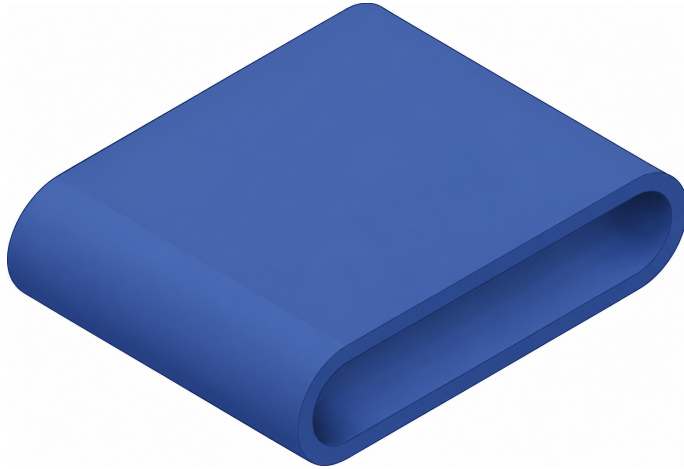

Inflated height (mm)	81	Over	Nominal size Up to and including	Tolerance E3 +/-	Manufacturing tolerance		 INFLATABLE GASKETS INFLATABLE SEALING SOLUTIONS	Date 09.09.2026		Page A4 · 1/1					
Cross-sectional area (mm²)	520				ISO 3302-1: 2014 E3										
Weight (kg/m)	0.789				Material					Drawn by Serhat Çınar		Approved by Arif Çınar			
INFLATION PRESSURE (bar)					Silicone rubber										
Recommended	0.69				Hardness: 60 Shore A			Colour: Natural				Revision No: 0		Scale: -	
Maximum	0.97				Projection										
MIN. BEND RADIUS (mm)															
Radially inward	30														
Radially outward	30														
Axial	Not specified														
							Beykent Industrial Estate		Prepared by Çınar Silikon						
							141 Sakarya Street		Mam. San. ve Tic. Ltd. Şti.						
							Buyukcekmece / Istanbul		Reproduction or sharing						
							Turkey		with third parties requires						
							+90 538 840 29 87		prior written permission.						
							info@inflatablegaskets.com		info@cinarsilikon.com						
							www.inflatablegaskets.com		www.cinarsilikon.com						
											Profile No.				
											9689				